

M5 SEMI-AUTONOMOUS GRASPING APPROACH OF UNKNOWN OBJECTS IN UNDERWATER ENVIRONMENTS COMBINING STRUCTURED LIGHT AND A VIRTUAL SIMULATION ENVIRONMENT

A. Peñalver¹¹⁷, M. Prats¹¹⁸, J. J. Fernández¹¹⁹ and J. Sales¹²⁰

Abstract

Many scientific and industrial works that take place underwater are increasingly demanding for technology to allow their autonomous execution. Autonomous grasping of unknown objects by a robotic arm is a task that is being highly studied by researchers in the last years. This is a really difficult task in itself, but the problem is bigger if the grasp is done in underwater environments, where the sensors that can be installed in the arm, decrease their performance drastically. This paper describes an approach for semi-autonomous grasping of underwater unknown objects using a robotic arm. To achieve this purpose, a scan of the scene is performed using a structured laser beam attached to the forearm of the manipulator. At the same time, a digital video camera is used to capture the scene with the laser beam projected on the object. The laser stripes are triangulated to obtain a 3D point cloud. The entire process is shown inside an underwater simulator, acting in this case as a virtual representation of the real environment. This virtual representation allows the user to specify the grasp, to see how the grasp will be executed, and to monitor the final process in real time. To validate the good performance of the proposed approach, several grasping experiments with two different objects have been performed in water tank conditions with a real I-AUV system.

Keywords - Intervention AUV, 3D reconstruction, semiautonomous grasping, underwater recovery.

INTRODUCTION

This paper proposes a combination of structured light and a virtual simulation environment that allows a user to specify the grasping points of a real unknown object in a 3D reconstructed scenario. This approach allows semi-autonomous grasping of underwater unknown objects using a robotic arm mounted in a fixed underwater platform.

SCENARIO AND SYSTEM DESCRIPTION

The scenario includes a 2m x 2m x 1.5m water tank, whose floor recreates a real seafloor (see Fig. 1 left). The I-AUV consists of a fixed 4 D.O.F. robotic arm (CSIP Light-weight ARM5E with four metal fingers in its end-effector [1]) that is attached to an underwater vehicle floating inside the tank. The vehicle is equipped with an underwater camera (Bowtech 550C-AL) that is placed near the base of the arm and is looking downwards. The 3D reconstruction is done with a laser stripe emitter (Tritech SeaStrip) attached on the forearm of the manipulator. The user interface is provided by the Underwater Simulator UWSim [2].

3D RECONSTRUCTION OF THE SCENE & GRASP SPECIFICATION

To reconstruct the geometry of the unknown object by using the laser strip, the floor is scanned by moving the elbow joint of the manipulator at a constant velocity (see Fig. 1 right). During the scan, a visual processing algorithm runs in parallel: the laser peak detector, which is in charge of segmenting the laser stripe from the rest of the image and computing the 3D points [3]. With these points, a 3D point cloud of the scene is made.

Once the scene has been reconstructed, the virtual environment, the 3D point cloud, and a snapshot of the scene (taken by the camera before the laser scan) can be observed in the simulator (see Fig.2). The user then specifies the grasp by selecting two antipodal grasp points on the snapshot image. A CAD model of the end-effector of the manipulator is also represented on the scene, thus improving the virtual representation of the real grasp.

AUTONOMOUS GRASP DETERMINATION & EXECUTION

Using the prior sensors information and the arm constraints, the best grasp position and orientation is autonomously calculated. The CAD model of the end-effector is properly positioned and orientated over the point cloud in the simulator. The user can see how the grasp is going to be performed and can decide to choose different grasp points before launching the grasp. Once the grasp is launched, the end-effector autonomously reaches the position and orientation selected in the previous step. Then the hand of the manipulator is closed until the current of the hand motor reaches a threshold. At this moment the arm with the recovered object moves back to the home position.

LAST REMARKS

The proposed approach has been tested thoroughly with two different objects: a wooden trunk and a clay vessel (see Fig. 1 and 2). The first one produces a good 3D reconstruction and good grasps despite its nonuniform shape. In the second case, the shape is more uniform but due to some white spots on it, which reflect the laser light, the reconstructions are not so good and therefore, the grasp is not always satisfactory.

The proposed approach based on 3D structured light provides a good alternative to the use of other sensors that could not perform well in underwater environments (low visibility, bad propagation of signals, humidity, etc.). The use of a simulation environment provides 3D visual feedback and a preview of the specified grasps.

ACKNOWLEDGMENTS

This research was partly supported by Spanish Ministry of Research and Innovation DPI2011-27977-C03 (TRITON Project), by the European Commission's Seventh Framework Programme FP7/2007-2013 under Grant agreement 248497 (TRIDENT Project), by Foundation Caixa Castelló-Bancaixa PI.1B2011-17.

REFERENCES

- [1] J. J. Fernández, M. Prats, J. C. García, R. Marín, P. J. Sanz and A. Peñalver. "Manipulation in the Seabed: A New Underwater Robot Arm for Shallow Water Intervention", 1st IFAC Conference on Embedded Systems, Computational Intelligence and Telematics in Control, CESCIT 2012, pp. 314- 319 ISBN: 978-3-902661-97-5, 3-5 April 2012, Würzburg, Germany.
- [2] M. Prats, J. Pérez, J. J. Fernández, P. J. Sanz, "An Open Source Tool for Simulation and Supervision of Underwater Intervention Missions", Proceedings of the 2012 IEEE/RSJ International Conference on Intelligent Robots and Systems, pp. 2577-2582, ISBN: 978-1-4673-1735-1, Vilamoura, Algarve (Portugal), October 2012.
- [3] M. Prats, J. J. Fernández, P. J. Sanz, "Combining Template Tracking and Laser Peak Detection for 3D Reconstruction and Grasping in Underwater Environments", Proceedings of the 2012 IEEE/RSJ International Conference on Intelligent Robots and Systems, pp. 106-112, ISBN: 978-1-4673-1735- 1, Vilamoura, Algarve (Portugal), October 2012.
- [4] Hsin-Hung Chen, Chau-Chang Wang, and Fu-Chuan Hung. Comparative assessments of peak detection algorithms for underwater laser ranging. In Proc. OCEANS '04. MTTs/IEEE TECHNO-OCEAN'04, volume 3, pages 1229-1234, 2004.



Fig. 1 The vehicle is equipped with a light-weight robot arm and a 4-finger gripper, an underwater looking down camera and the 3D laser stripe emitter (left).
 The I-AUV grasping a wooden trunk inside the water tank (right).

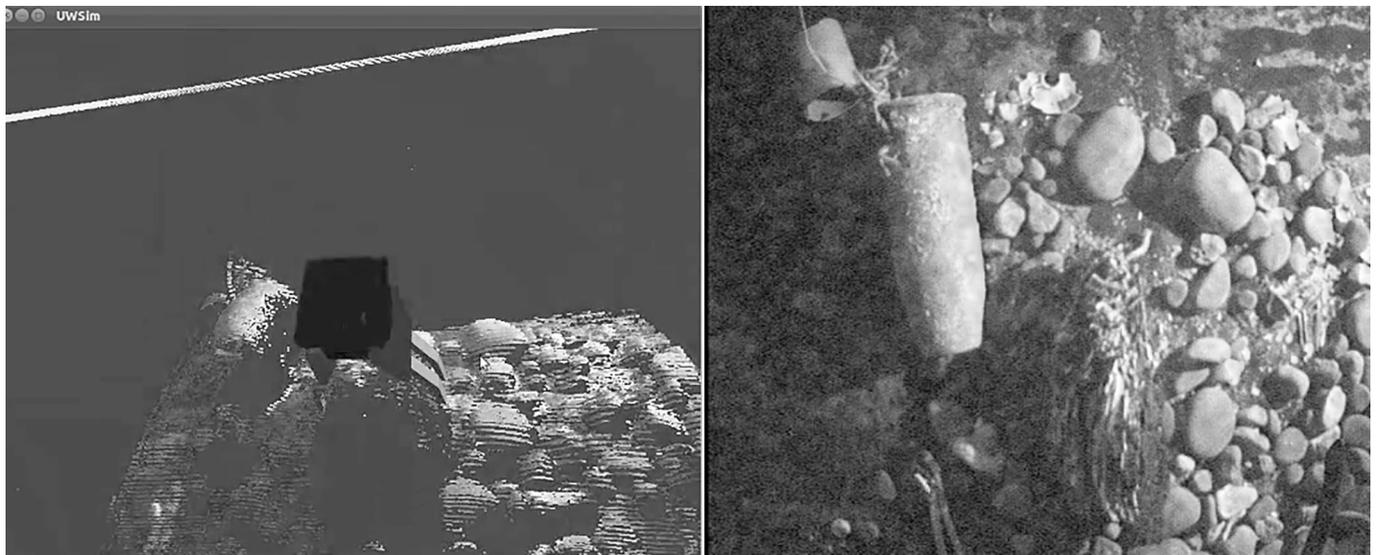


Fig. 2 Reconstructed scenario in the UWSim underwater simulator: 3D point cloud and CAD model of the end-effector (left).
 Real scenario captured by the camera with the two experimental objects (right).