

Concentrated Ground Plane Booster Antenna Technology for Multiband Operation in Handset Devices

Cristina PICHER¹, Jaume ANGUERA^{1,2}, Aurora ANDÚJAR¹, Carles PUENTE³, Adrián BUJALANCE²

¹ Technology Department, Fractus, Barcelona, Spain

² Electronics and Communications Department, Universitat Ramon Llull, Barcelona, Spain

³ Signal Theory and Communications, Universitat Politècnica de Catalunya, Spain

jaume.anguera@fractus.com

Abstract. The current demand in the handset antenna field requires multiband antennas due to the existence of multiple communication standards and the emergence of new ones. At the same time, antennas with reduced dimensions are strongly required in order to be easily integrated. In this sense, the paper proposes a compact radiating system that uses two non-resonant elements to properly excite the ground plane to solve the abovementioned shortcomings by minimizing the required Printed Circuit Board (PCB) area while ensuring a multiband performance. These non-resonant elements are called here ground plane boosters since they excite an efficient mode of the ground plane. The proposed radiating system comprises two ground plane boosters of small dimensions of 5 mm x 5 mm x 5 mm. One is in charge of the low frequency region (from 0.824 GHz to 0.960 GHz) and the other is in charge of the high frequency region (1.710 GHz–2.170 GHz). With the aim of achieving a compact configuration, the two boosters are placed close to each other in a corner of the ground plane of a handset device (concentrated architecture). Several experiments related to the coupling between boosters have been carried out in two different platforms (barphone and smartphone), and the best position and the required matching network are presented. The novel proposal achieves multiband performance at GSM850/900/1800/1900 and UMTS.

Keywords

Handset antennas, multi-band, non-resonant antennas, ground plane modes.

1. Introduction

The current requirements in handset antenna design are related to multiband operation and miniaturization. A popular platform which is gaining popularity is the smartphone, which features bigger dimensions than conventional cellular barphones. However, the available space for the antenna is still limited due to the presence of large displays, batteries and related components (multiple cameras, hands-free speakers). The consequences of adding all these functionalities is a challenge for the antenna design

because the antenna should have small dimensions in order to be easily integrated with such other elements of the device.

There are different ways of designing multiband and miniature antennas, which basically consist in shaping the geometry of different types of antennas like monopoles [1]–[5], PIFAs [6]–[9], and slots [10], or even adding parasitic elements to the radiating system [11], [12]. However, the antenna is not the only contributor to the radiation since the ground plane also plays a very important role in the overall radiating system [13]–[44].

As it was demonstrated in [14]–[20], the antenna bandwidth can be improved by achieving a ground plane length of approximately 0.4λ at the operating frequencies because the ground plane fundamental mode is efficiently excited. For example, in [17]–[25], slotted ground planes are used in order to achieve a longer electrical path in a shorter physical length with the aim of exciting the fundamental mode of the ground plane which is an efficient radiating mode.

Based on the same principle and knowing that the ground plane is the main contributor, there have been different studies which used the excitation of the ground plane as the principal means to obtain good radiation [29]–[45]. One way of achieving this excitation is through the use of coupling elements, which are strategically located in order to properly excite the ground plane and have a certain C-shape to obtain such coupling [35]–[42]. In [35], a monoband antenna system comprising a microstrip line and a coupling element of 2400 mm^3 was presented, and in [36], two coupling elements occupying a volume of 700 mm^3 , a ground plane, and a matching circuitry were needed in order to obtain a quad-band radiating system. One element was required for the GSM850/900 bands and the other for the GSM 1800/1900 bands. Despite those couplers relied on a different principle than common handset antennas, they still featured a significant size similar to those (i.e. a size about the entire shortest edge of a mobile platform), therefore not providing a significant advantage compared to state-of-the-art antennas.

A different way of exciting the ground plane is by means of using very simple and small structures called

ground plane boosters, as proposed in [29]–[32] without the need of using said aforementioned C-shaped structures. The ground plane boosters proposed here are solid metallic structures featuring a cube shape and connected with a feeding point to the ground plane. In [31], ground plane boosters have been used to properly excite the ground plane mode to obtain a multiband performance (GSM850/900/1800/1900, and UMTS) with a total volume of only 250 mm³. In [32], planar booster elements (2D) were used to obtain LTE700, GSM850/900/1800/1900, UMTS, LTE2300/2500 and GPS with a total footprint of only 153 mm². These elements feature a non-resonant behavior with a very high quality factor (Q) compared to resonant antennas. Such a high Q explains the non-radiating nature of those elements. The name of ground plane booster was therefore proposed to describe such reactive, high-Q, non-radiating and non-resonating simple elements that are mainly used to excite the ground plane in order to obtain an efficient radiating structure [29]–[33], which can be obtained by exciting the first mode according to the characteristic modes theory [31], [44]. In particular, the modal significance has been computed for a ground plane having 100 mm × 40 mm (Fig. 1). When the modal significance is close to one, the mode is resonant and radiative mode whereas a mode having a modal significance close to zero means a reactive mode. For a ground plane having a 100 mm × 40 mm size, the main mode (J_1) dominates across the frequency region of 800 MHz to 2 GHz. Up to that point, J_1 and J_4 play an important role being still J_1 predominating up to 2.5 GHz. From current simulation shown in the following sections, it will be demonstrated that at the low frequency region the current distribution is mainly determined by J_1 and for the high frequency region is a linear combination of J_1 and J_4 .

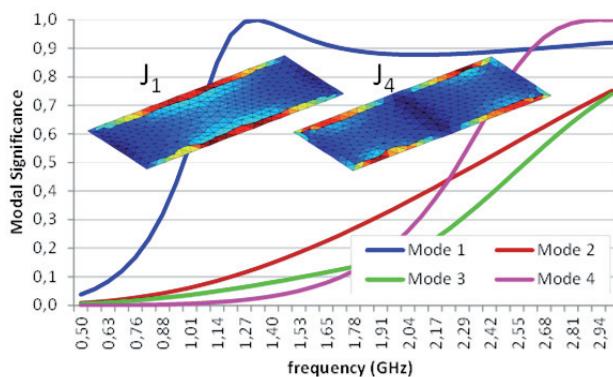


Fig. 1. Computed modal significance for the first eigen-modes for a ground plane of 100 mm × 40 mm. Current distribution associated to the first J_1 and fourth J_4 eigen vectors.

In the present study, such ground plane boosters have been used with the aim of achieving good radiation performance in several frequency bands in a novel configuration featuring a concentrated architecture [32]. In [31], a distributed configuration (Fig. 2a) was presented. Since the antenna engineer has a lot of constraints in terms of available area for the antenna, a further research has been carried out to obtain a different solution capable of reduc-

ing the required PCB area. In this case, a novel concentrated solution (Fig. 2-b) using two closely spaced ground plane boosters has been designed and analyzed. In principle, since both boosters are closely spaced, mutual coupling drastically degrades the performance compared to the distributed solution. Therefore, this paper analyzes different configurations and filter schemes capable of mitigating the mutual coupling while obtaining a multiband performance at the low and high frequency region in two different topologies of ground planes: a barphone and a smartphone. The latter has been included in order to establish the behavior of the proposed technology in one of the most popular devices of the current market demand.

The paper is divided as follows. Section 2 explains the behavior of the boosters that form the radiating system. Section 3 illustrates the measurements of the built prototype in order to validate the simulation results shown in the previous section. Finally, in Section 4, the conclusions are presented.

2. The Radiating System

The radiating structure of a first proposed design consists of a 100 mm × 40 mm ground plane, which is a typical size of a conventional barphone, and two metallic ground plane boosters of 5 mm × 5 mm × 5 mm located in one corner of the ground plane (Fig. 2-b). Owing to the reduced dimensions of the boosters and their close arrangement, the solution confines the multiband radiating solution of the mobile platform in an extremely concentrated configuration.

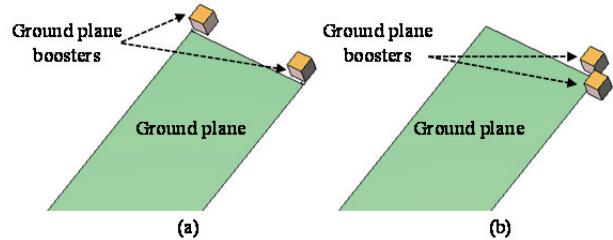


Fig. 2. (a) Two ground plane boosters distributed in each corner of the ground plane of a handset device; (b) concentrated configuration having both boosters close to each other (without being connected).

2.1 Functional Analysis

The position of the boosters and their separation is a critical factor that needs to be taken into account in the design process as it is explained next.

The radiating system needs to offer a multiband performance able to satisfy the current market demand. Thus, it should operate in the common cellular frequency bands, such as GSM850/900/1800/1900, and UMTS.

As discussed, the ground plane boosters are non-resonant and non-radiating elements, as they feature a high quality factor in each of the target frequency bands

($Q \approx 2250$ @0.9 GHz and $Q \approx 265$ @1.8 GHz) [31]. However, their position helps the radiation modes in the ground plane to be efficiently excited and provide good radiation performance. Therefore, the radiating structure comprises the ground plane boosters and the ground plane. A matching network is then added to provide the impedance matching at the desired frequency bands.

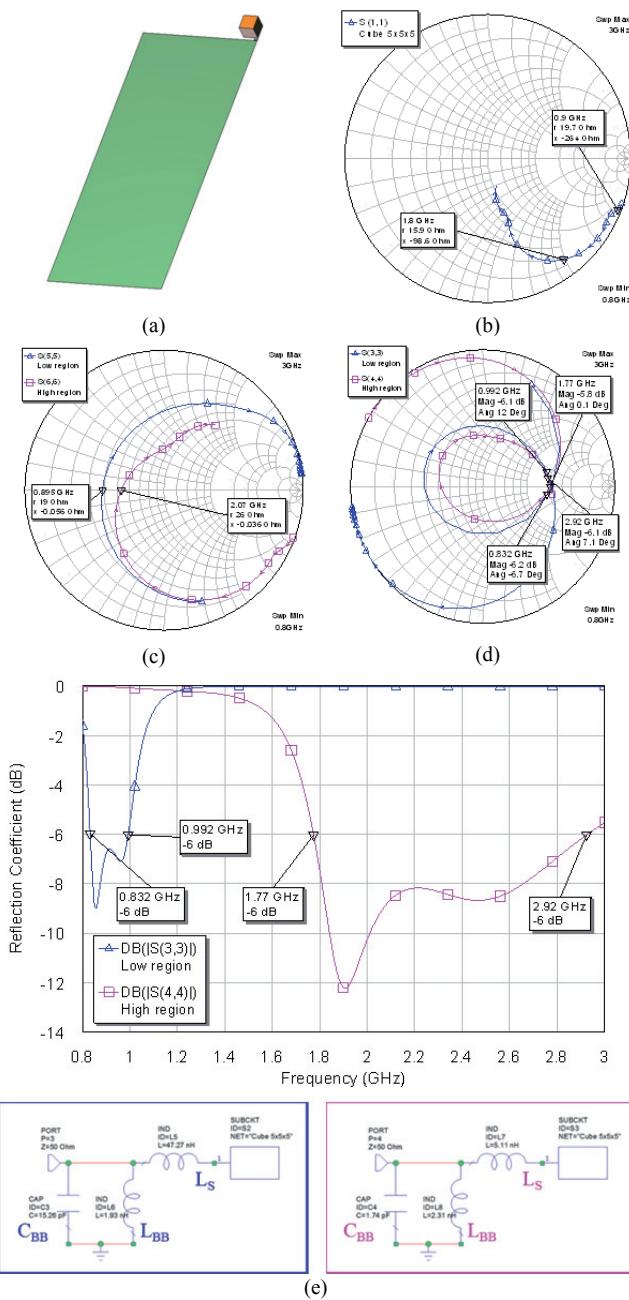


Fig. 3. Matching procedure applied at both frequency regions.
 (a) 3D view of the radiating structure. (b) Impedance of the radiating structure without any matching network. The ground plane booster has a strong capacitive behavior at both frequency regions. (c) The radiating structure resonates at 0.9 GHz or 2.0 GHz depending on the value of the series inductor. (d, e) The ground plane booster can be matched at both frequency regions offering good bandwidth results by means of different broadband matching networks.

First of all, it is necessary to understand the behavior of each booster in each frequency region independently, that is, having only one ground plane booster (Fig. 3-a). These ground plane boosters are highly reactive elements with a strong capacitive behavior across the desired frequencies (Fig. 3-b). In order to make them resonant, a series inductor (L_S) is added which results in an input impedance as an RLC series circuit (Fig. 3-c). After that, a broadband matching network (L_{BB} and C_{BB}) [45], [46] is added to enhance the bandwidth. The objective of the broadband matching network (a shunt LC circuit) is to create an input impedance loop that can be inscribed within the $SWR = 3$ circle of the Smith chart. With the proposed matching network, the bandwidth can be enhanced by a factor of 2.45 ($SWR = 3$), which is significant taking into account that only two components are used [47].

In the case of the booster for the low frequency region, good bandwidth results are obtained with a series inductor (L_S) of 47.3 nH, and a broadband matching network comprising a 1.9 nH inductor (L_{BB}) and a 15.3 pF capacitor (C_{BB}) (Fig. 3-d, e). For the booster in charge of the high frequency region, a similar matching network topology is applied, consisting of a series inductor of 5.1 nH (L_S) and a broadband matching network composed of a 2.3 nH inductor (L_{BB}) and a 1.7 pF capacitor (C_{BB}) (Fig. 3-d, e).

It has been found that the optimum position is in the shortest edge of the ground plane [31] because it is the place where the ground plane mode is efficiently excited.

With the objective to simultaneously cover the desired frequency bands, a modular radiating system is preferred. This means that two ground plane boosters are needed to match each one at one frequency region as in Fig. 2-b.

Each booster behaves correctly when it is alone and in the optimum position (Fig. 3). However, since a concentrated and multiband radiating system is needed, both boosters need to be working simultaneously and occupy the minimum possible area. Therefore, the first approach is to place them close to each other in the same edge (Fig. 4). Note that the advantage of the concentrated configuration having both boosters close together (compared to other configurations [27]) relies on the fact that the connection to a multiband front-end module is simplified since the feeding lines for each booster may be short. As it can be observed after simulating the radiating system using the electric scheme of Fig. 3-e, the required performance is not achieved (Fig. 4). In the low frequency region, the S_{11} is above -6 dB and the S_{21} presents unsatisfactory values (-0.28 dB), which means that this particular configuration as it becomes completely useless for a modern multiband phone. In order to guarantee the same behavior as the one shown in Fig. 3, both boosters should have low S_{21} values ($S_{21} < -20$ dB) in both frequency regions and therefore, be less coupled. In this sense, and as presented in the following section, the purpose of this paper relies on providing a proper isolation in order to guarantee the performance of this novel concentrated solution.

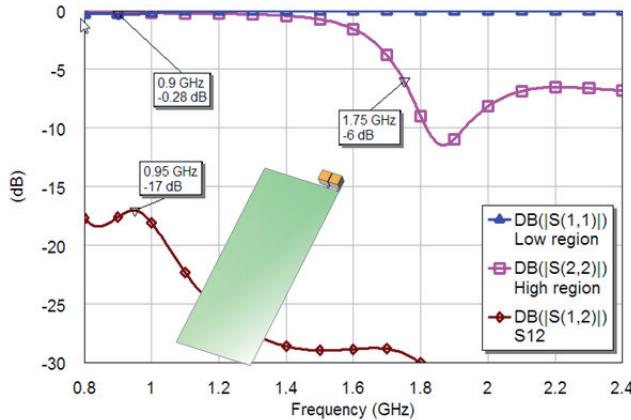


Fig. 4. Impedance response of the radiating system comprising two boosters close to each other. They use the same matching network as the one shown in Fig. 3. Multiband performance is not achieved in the low frequency region due to the strong mutual coupling.

2.2 Coupling Analysis

Commonly, the coupling of a determined circuit is directly measured by the S_{21} parameter. However, in this case, it would not be fair to rely on it because the boosters are non-resonant elements presenting very high impedance at the frequencies of interest and therefore they are totally mismatched when no matching network is used. Since they are not matched, they do not interfere to each other and therefore, the S_{21} is very low and therefore is not realistic [48]. For this reason, the maximum available gain (MAG) is calculated [49]. Maximum available gain takes into account conjugate matching at both ports.

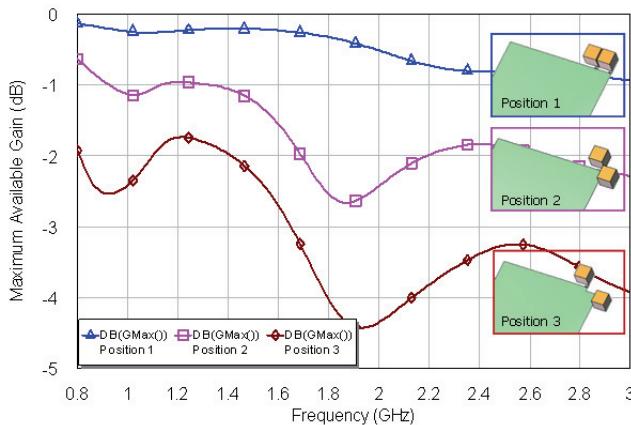


Fig. 5. Maximum available gain values obtained for the three experiments gathering different ground plane boosters' arrangements. The coupling decreases (the maximum available gain decreases) from position 1 (the worst) to position 3 (the best).

Without losing the objective of achieving a concentrated configuration, three different positions have been analyzed in terms of MAG. The first one (position 1) has both boosters next to each other in the same axis separated by 1.5 mm (Fig. 5). On the contrary, the second and third

positions (position 2 and 3) feature a different configuration because both boosters minimize the area of close contact as they are orthogonal to each other. In the second position, each booster is aligned with one of the edges of the ground plane (Fig. 5), and in the third position, they follow the same configuration but one of the boosters is located 5 mm away from the ground plane's corner (Fig. 5).

The best position is ‘position 3’ because it is the one where the radiating structure presents the lowest MAG between boosters, that is, less coupling. However, the configuration is not as concentrated as the other ones. On the contrary, ‘position 1’ presents the highest (worst) MAG values because the area of contact between boosters is larger. Hence, the chosen position is ‘position 2’ because it presents the best trade-off between compactness and coupling. This position shows lower MAG values compared to ‘position 1’ because the area of contact between boosters is lower.

2.3 Multiband Performance

Once the location for both boosters is chosen, it is important to establish the matching network needed for each frequency region (Fig. 6-a). As it has been explained in Section 2, each booster needs a series inductor in order to make it resonant at a given frequency within the band of operation, and a broadband matching network to achieve good bandwidth.

The booster located in the upper part of the shortest edge of the ground plane (Fig. 6-b) is responsible for the low frequency region, and the booster located next to the left side of the longer edge (Fig. 6-b) is in charge of the high frequency region. The radiating system has two input ports, one for each frequency region. This may be useful for front-end modules having separate entries for each frequency region/band as some used in some cellular phones. If needed, both ports can be merged into one by means of combining filters [31].

Based on the study of the MAG, ‘position 2’ reduces coupling compared to ‘position 1’. However, they still do not behave as if they were alone and some kind of filtering to reduce coupling is needed. For the series inductor (L_{Slow}) corresponding to the low frequency region acts as high impedance at the high frequency region (its value of the order of 40 nH is a high impedance at the high frequency region), no filters are required to obtain better isolation at the high frequency region. However, the series inductor (L_{Shigh}) corresponding to the high frequency region is low (of the order of 12 nH) and it does not present high impedance in the low frequency region (12 nH is not a high impedance at the low frequency region). That is why a notch filter is needed in this case to achieve a good isolation at the low frequency region. In this sense and thanks to the lower coupling values between boosters obtained due to their relative location, only a simple notch filter (one stage) is added.

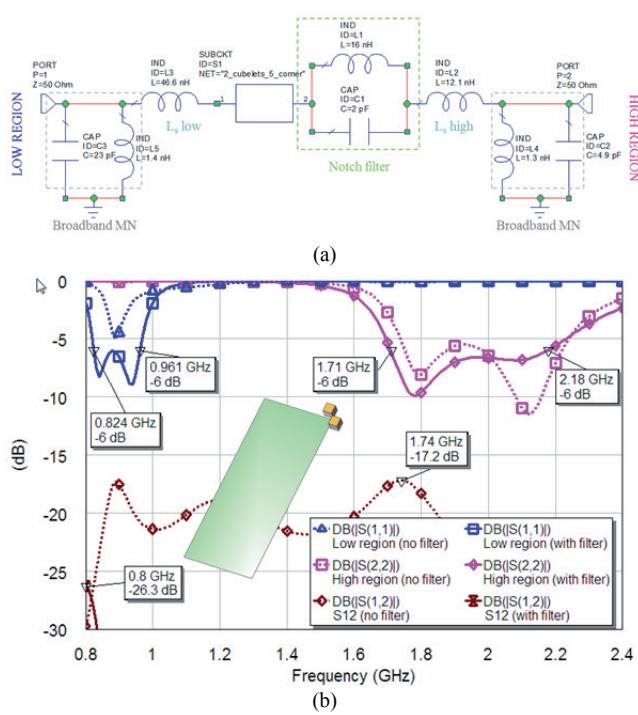


Fig. 6. (a) The matching network consists of 8 lumped elements. (b) Thanks to the notch filter (high impedance at frequencies around 0.9 GHz) and the broadband matching networks, multiband operation and good isolation between boosters is obtained. When no filter is used (dashed lines), coupling increases and operation in the low frequency region is lost.

After optimizing the components' values of the matching network, the multiband performance is achieved with occupying only 250 mm^3 (Fig. 6-a). Simulation results show that the radiating system is matched ($\text{SWR} \leq 3$) from 0.824 GHz to 0.961 GHz (GSM850 and GSM900 as well as some LTE standard within this range such as LTE900) and from 1.71 GHz to 2.18 GHz (GSM1800, GSM1900, UMTS, as well as some LTE standards within this range such as LTE1800, 1900, 2100) (Fig. 6-b). S_{21} is below -26 dB along the desired frequency bands (Fig. 6-b).

It is important to remark that without the filter it is not possible to keep the desired multiband behavior, especially in the low frequency region due to the mutual coupling (Fig. 6). Thanks to the notch filter, coupling decreases 10 dB with respect the solution without the notch filter and better performance from 0.824 GHz to 0.960 GHz is achieved.

Although the notch filter plays an important role in the performance of the radiating system, the position is also a key factor in terms of coupling. When both boosters are in 'position 1', despite having the notch filter, the multiband response gets worsen and out of the required specs, especially in the low frequency region, where GSM900 is lost (Fig. 7). Therefore, both the position and the filter play an important role in determining the multiband performance with highly isolated ports.

Since the smartphone platform is gaining interest, a new experiment considering a ground plane of

$120 \text{ mm} \times 50 \text{ mm}$, which is a typical size of said platform, has been carried out. Using the same ground plane booster architecture and the same matching network, the performance of the new radiating system has been also simulated (Fig. 8). As it is observed in Fig. 8, the impedance performance of the concentrated ground booster antenna technology in the new platform is not altered in the low frequency region and even enhanced in the high frequency region, which means that the proposed architecture is a standard solution for both types of platforms.

Current distributions on the ground plane (Fig. 9) also show that the predominant mode (first mode) of the radiating structure at 0.9 GHz presents a current distribution similar to that produced by a half-wavelength dipole, that is, null at the short edges of the ground plane and maximum at the center on the long edge. At 1.8 GHz, although the current distribution slightly differs from the one obtained in the low frequency region, the first mode J_1 is still predominant (main current follows the y-direction) and also the J_4 mode appears.

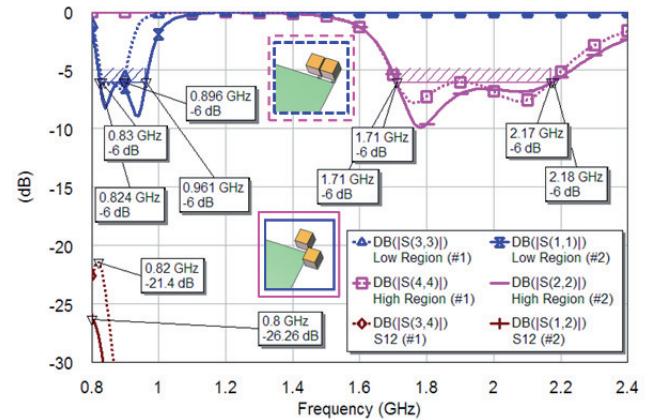


Fig. 7. The radiating system with the optimized matching network that uses a notch filter has less bandwidth in the low frequency region when boosters are in 'position 1' compared to the proposed 'position 2'.

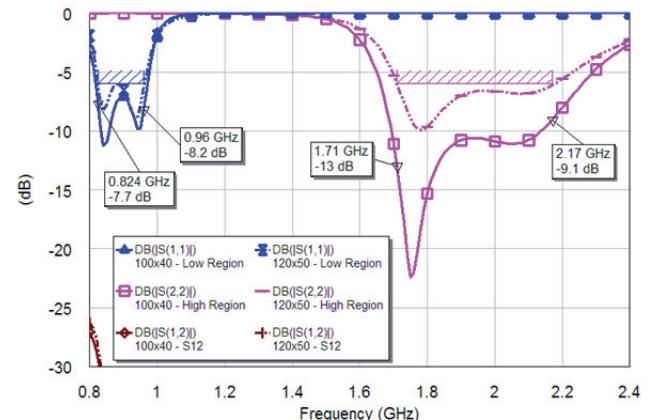


Fig. 8. The multiband behavior is perfectly achieved using a smartphone platform of $120 \text{ mm} \times 50 \text{ mm}$. Impedance matching is enhanced in the case of the largest ground plane, especially in the high frequency region. Both platforms offer good isolation at both frequency regions ($> 26 \text{ dB}$).

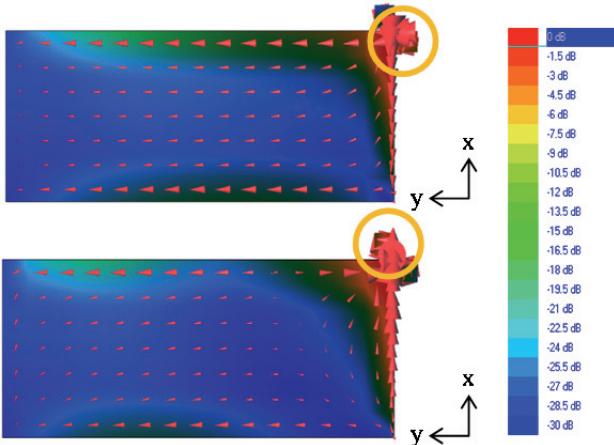


Fig. 9. Current distribution of the radiating system (also taking into account the matching network) at 0.9 GHz (top) and 1.8 GHz (bottom) (current max: 4 A/m). The circle indicates the booster with stronger excitation.

It is also useful to see the current distribution in both frequency regions to show that both boosters work closely to each other without being interfered (Fig. 9). At 0.9 GHz, the main player of the radiation is the booster aligned with the longest edge of the ground plane (Fig. 9, top) because it is more excited. Since the other booster has density current values below -20 dB, good isolation is demonstrated. At 1.8 GHz, the same phenomenon is observed (Fig. 9, bottom) although now, the main player is the booster aligned with the shortest edge of the ground plane.

3. Measurements

With the purpose of validating the simulation results, two prototypes made of FR4 with solid metallic boosters has been built and measured. Each ground plane booster of $5 \text{ mm} \times 5 \text{ mm} \times 5 \text{ mm}$ is located (orthogonal disposal) in one side of a corner of the $100 \text{ mm} \times 40 \text{ mm}$ and $120 \text{ mm} \times 50 \text{ mm}$ ground plane respectively featuring the concentrated solution (Fig. 10).

The radiating system has been matched following the teachings of the simulation results. The final matching network of the built prototype consists of 9 lumped elements from Murata (high Q tight tolerance). For the low frequency region, a series inductor ($L_{\text{Slow}} = 36 \text{ nH}$) and a broadband matching network ($L_{\text{BB}} = 2.2 \text{ nH}$ and $C_{\text{BB}} = 15 \text{ pF}$) are needed. For the high frequency region, a notch filter ($L_N = 18 \text{ nH}$ and $C_N = 1.8 \text{ pF}$), a series inductor ($L_{\text{Shigh}} = 8.7 \text{ nH}$), and a broadband matching network ($L_{\text{BB}} = 1.3 \text{ nH}$, $C_{\text{BB}} = 5.1 \text{ pF}$) with some fine-tuning components ($C_S = 7 \text{ pF}$, $C_P = 1.5 \text{ pF}$) are used.

The measured reflection coefficient (Fig. 11) in both prototypes is below -6 dB from 0.819 GHz to 0.969 GHz, and from 1.71 GHz to 2.2 GHz, which means that the radiating system may be operative in many frequency bands such as GSM850, GSM900, GSM1800, GSM1900, and UMTS. S_{21} is below -21 dB among the low and high frequency regions in both prototypes, ensuring a good isolation between ports, which agrees with the simulation.

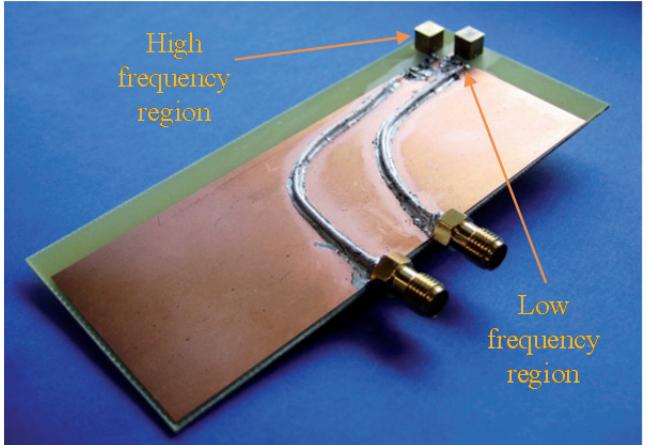


Fig. 10. Built prototype. Ground plane is $100 \text{ mm} \times 40 \text{ mm}$ printed over a 1 mm thick FR4 substrate. Ground plane boosters are $5 \text{ mm} \times 5 \text{ mm} \times 5 \text{ mm}$. The same scheme is used for the ground plane of $120 \text{ mm} \times 50 \text{ mm}$ representative of the smartphone.

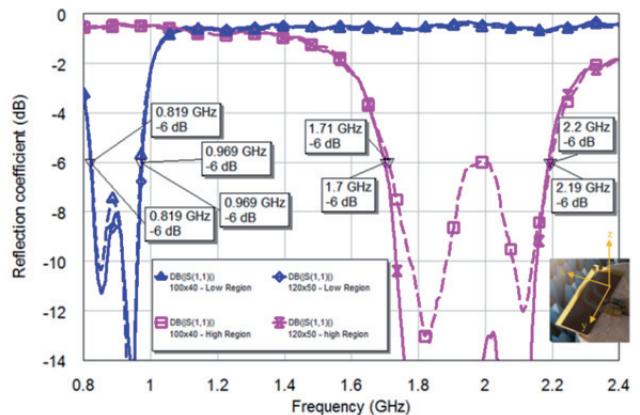


Fig. 11. The radiating system is matched from 0.824 GHz to 0.969 GHz and from 1.71 GHz to 2.17 GHz in both platforms.

The efficiency has been measured using 3D pattern integration using the anechoic chamber Satimo Stargate 32. Regarding the radiation efficiency values (η_r) of the $100 \text{ mm} \times 40 \text{ mm}$ prototype (Fig. 12 and Fig. 13), acceptable results have been obtained among the low and high frequency region, offering average values of 49 % and 64 %, respectively. The total antenna efficiency (η_a) (Fig. 12 and Fig. 13 which also takes into account the mismatch losses ($\eta_a = \eta_r \cdot (1 - |S_{11}|^2)$)), reaches a peak of 55 % in the low frequency region and 63 % in the high frequency region, which is a high value considering the small volume of the booster element.

Regarding the smartphone prototype, the efficiency results (Fig. 12 and Fig. 13) are considerably better than in the previous prototype of $100 \text{ mm} \times 40 \text{ mm}$ because the ground plane fundamental mode is better excited due to its larger size (more close to 0.4λ at the operating frequencies [14], [46]). Based on the characteristic mode analysis in [46], the smartphone platform presents better modal significance values (closer to 1) in the low frequency region than the barphone platform. This results in a better efficiency of the smartphone case. In this case, the impedance matching

is similar but the radiation efficiency is much higher because the whole radiating system radiates more efficiently. Therefore, the smartphone provides an average total antenna efficiency of 51 % in the low frequency region and a 70 % in the high frequency region.

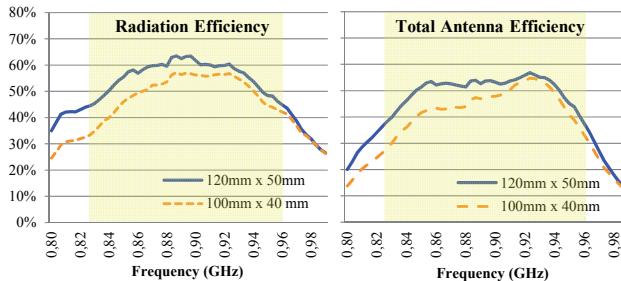


Fig. 12. Measured efficiency values in the low frequency region of both prototypes. Highlighted area indicates the frequencies range of 0.824 GHz–0.960 GHz.

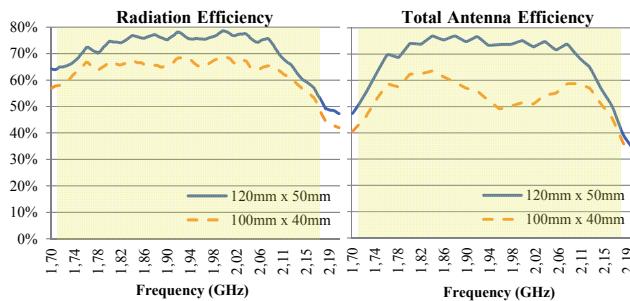


Fig. 13. Measured efficiency values in the high frequency region of both prototypes. Highlighted area indicates the frequency range of 1.71 GHz–2.17 GHz.

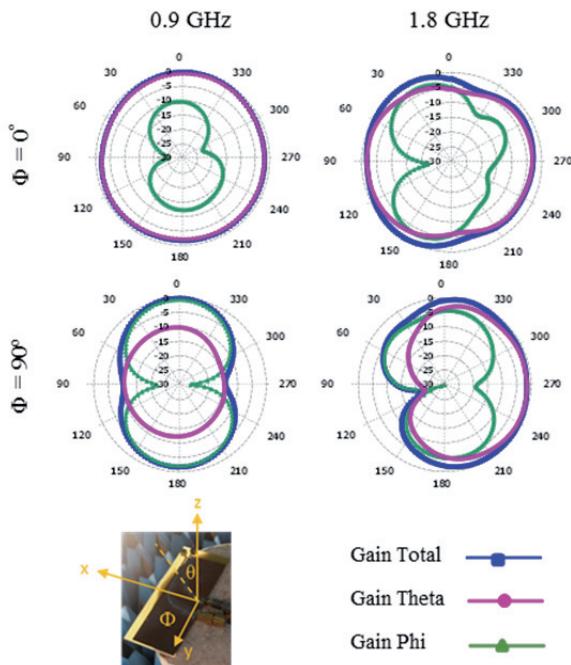


Fig. 14. Measured radiation patterns at 0.9 GHz and 1.8 GHz. The radiation patterns of the 120 mm × 50 mm ground plane feature a similar shape but they have not been included for the sake of brevity.

Finally, radiation patterns have also been measured in the same anechoic chamber. The main cuts normalized to the maximum gain ($\phi = 0^\circ$ and $\phi = 90^\circ$) are shown at 0.9 GHz and 1.8 GHz. Both prototypes present an omnidirectional behavior in $\phi = 0^\circ$ and a deep in the y-axis at both frequency regions (Fig. 14) which is the typical dipole type pattern for this kind of handset platforms. Although a slightly different shape is observed in 1.8 GHz, the radiation pattern is still omnidirectional and no directional lobes are observed.

It is remarkable the small size of only 250 mm³, which is much smaller than other existing antennas providing also operability at 5 frequency bands, such as typical PIFA antennas with an average volume of 6600 mm³ and monopole antennas with an average volume of 2200 mm³ [47]. This makes this solution interesting for the new generation of wireless handheld devices including smartphones.

4. Conclusions

A new radiating system based on ground plane booster technology has been presented. Basically, this technology uses simple elements called ground plane boosters for exciting the efficient radiation mode of the ground plane, which presents high radiation efficiency at the frequencies of interest.

Although each ground plane booster can satisfactorily operate in one frequency region, when they work close to each other with the purpose of obtaining a concentrated and a multiband radiating system, coupling between them increases and its operability becomes severely degraded. In order to overcome such a limitation, a new architecture where boosters are orthogonally disposed in a corner of the PCB has been proposed. This new solution satisfies the two main requirements: low coupling between boosters and compactness.

While the orthogonal arrangement of the boosters with respect to the ground plane improves the coupling, it is still not sufficient to guarantee operation since the input impedance and isolation levels are still out of bounds. In this sense, the proposed radiating system for the 100 mm × 40 mm platform further includes a matching network with a notch filter. Such a notch filter, when combined with the specific arrangement of boosters and the ground plane, results in a significant improvement of the overall performance, particularly in the low frequency region.

The present research has also been focused on analyzing how this technology behaves in a smartphone platform and it has been concluded that there is no need to change the radiofrequency system because the new platform does not affect the impedance response, while at the same time the efficiency becomes significantly improved. That is, the proposed architecture performs robustly across different platforms, which suggest the potential advantage

of a standardized solution. This would in turn become a very significant advantage as mobile devices currently require a customized platform and a specific antenna system. The measured results demonstrate that good matching and satisfactory efficiency values can be obtained at least from 0.824 GHz to 0.96 GHz and from 1.71 GHz to 2.17 GHz, which means that the proposed radiating system can operate in many frequency bands such as GSM850, GSM900, GSM1800, GSM1900, and UMTS, as well as in many LTE standards within the above frequency range. Furthermore, the volume is only 250 mm³ compared to the average of 6600 mm³ of PIFA and 2200 mm³ of monopoles used in many commercial phones.

Based on the obtained results, it is concluded that the proposed technique is a useful and promising antenna solution offering a concentrated configuration, operating in multiple frequency bands, and only requiring a small volume (250 mm³) of the handset device.

Acknowledgements

This work was financially supported by Fractus under Grant 2009 TEM00028 (Agència de Gestió d'Ajuts Universtaris i Recerca, Generalitat de Catalunya).

References

- [1] WONG, K. L. Planar antennas for wireless communications. *Wiley Series in Microwave and Optical Engineering*. New Jersey: John Wiley & Sons, 2003.
- [2] TUNG, H.C., FANG, C.Y., WONG, K.L. Dual band inverted-L monopole antenna for GSM/DCS mobile phone. In *IEEE Antennas and Propagation Society International Symposium*, vol. 3, 2002.
- [3] WONG, K.L., LEE, G.Y., CHIOU, T.W. A low-profile planar monopole antenna for multiband operation of mobile handsets. *IEEE Transactions on Antennas and Propagation*, January 2003, vol. 51, no. 1, p. 121–125.
- [4] ANGUERA, J., PUENTE, C., MARTÍNEZ, E., ROZAN, E. The fractal Hilbert monopole: A two-dimensional wire. *Microwave and Optical Technology Letters*, 2003, vol. 36, no. 2, p. 102–104.
- [5] LIN, S.Y. Multiband folded planar monopole antenna for mobile handset. *IEEE Transactions on Antennas and Propagation*, 2004, vol. 52, no. 7, p. 1790–1794.
- [6] LI, Z. RAHMAT-SAMII, Y. Optimization of PIFA-IFA combination in handset antenna designs. *IEEE Transactions on Antennas and Propagation*, 2005, vol. 53, no. 5, p. 1770–1778.
- [7] MARTÍNEZ, M., LETSCHKE, O., GEISSLER, M., HEBERLING, D., MARTÍNEZ, A. M., SÁNCHEZ, D. Integrated planar multiband antennas for personal communication handsets. *IEEE Transactions on Antennas and Propagation*, 2006, vol. 54, no. 2, p. 384–391.
- [8] KIM, B., PARK, S., YOON, Y., OH, J., LEE, K., KOO, G. Hexaband planar inverted-F antenna with novel feed structure for wireless terminals. *IEEE Antennas Wireless Propagation Letters*, 2007, vol. 6, p. 66–69.
- [9] HSIEH, H., LEE, Y., TIONG, K., SUN, J. Design of a multiband antenna for mobile handset operations. *IEEE Antennas Wireless Propagation Letters*, 2009, vol. 8, p. 200–203.
- [10] LIN, C. WONG, K. L. Printed monopole slot antenna for internal multiband mobile phone antenna. *IEEE Transactions on Antennas and Propagation*, 2007, vol. 55, no. 12, p. 3690–3697.
- [11] RISCO, S., ANGUERA, J., ANDÚJAR, A., PÉREZ, A., PUENTE C. Coupled monopole antenna design for multiband handset devices. *Microwave and Optical Technology Letters*, 2010, vol. 52, no. 2, p. 359–364.
- [12] SUGIMOTO, S., IWASAKI, H. Wide band planar monopole antenna with asymmetric parasitic elements. In *Proceedings of the Fourth European Conference on Antennas and Propagation (EuCAP)*. Barcelona (Spain), April 2010, p. 1–4
- [13] VAINIKAINEN, P., OLLIKAINEN, J., KIVEKÄS, O., KELANDER, I. Resonator-based analysis of the combination of mobile handset antenna and chassis. *IEEE Transactions on Antennas and Propagation*, 2002, vol. 50, no. 10, p. 1433–1444.
- [14] SALONEN, P. Effect of groundplane size on radiation efficiency and bandwidth of dual-band U-PIFA. In *IEEE Antennas and Propagation Society International Symposium*. Columbus (OH, USA), June 2003, vol. 3, p. 70–73.
- [15] HOSSA, R., BYNDAS, A., BIAŁKOWSKI, M. E. Improvement of concentrated terminal antenna performance by incorporating open-end slots in ground plane. *IEEE Microwave and Wireless Components Letters*, 2004, vol. 14, no. 6, p. 283–285.
- [16] ABEDIN, M. F., ALI, M. Modifying the ground plane and its effect on planar inverted-F antennas (PIFAs) for mobile phone handsets. *IEEE Antennas and Wireless Propagation Letters*, 2003, vol. 2, no. 1, p. 226–229.
- [17] ANGUERA, J., SANZ, I., SANZ, A., GALA, D., CONDES, A., PUENTE, C., SOLER, J. Enhancing the performance of the handset antennas by means of groundplane design. In *IEEE International Workshop on Antenna Technology Small Antennas and Novel Metamaterials*. New York (USA), March 2006, p. 29–32.
- [18] CABEDO, M., ANTONINO, E., RODRIGO, V., SUÁREZ, C., Análisis Modal de un Plano de Masa Radiante Doblado y con una Ranura para Terminales Móviles. In *XXI Simposium Nacional de la Unión Científica Internacional de Radio, URSI '06*. Oviedo (Spain), September 2006 (in Spanish).
- [19] TANG, I.T., LIN, D.B., CHEN, W.L., HORNG, J.H., LI, C.M. Compact five-band meandered PIFA by using meandered slots structure. In *IEEE Antennas and Propagation Society International Symposium*. June 2007, p. 653–656.
- [20] CABEDO, A., ANGUERA, J., PICHER, C., RIBÓ, M., PUENTE, C. Multi-band handset antenna combining a PIFA, slots, and ground plane modes. *IEEE Transactions on Antennas and Propagation*, 2009, vol. AP-57, no. 9, p. 2526–2533.
- [21] PICHER, C., ANGUERA, J., CABEDO, A., PUENTE, C., KAHNG, S. Multiband handset antenna using slots on the ground plane: Considerations to facilitate the integration of the feeding transmission line. *Progress In Electromagnetics Research C*, 2009, vol. 7, p. 95–109.
- [22] ANGUERA, J., SANZ, I., MUMBRÚ, J., PUENTE, C. Multi-band handset antenna with a parallel excitation of PIFA and slot radiators. *IEEE Transactions on Antennas and Propagation*, 2010, vol. AP-58, no. 2, p. 348–356.
- [23] RAZALI, A. R., BIAŁKOWSKI, M. E. Coplanar inverted-F with open-end ground slots for multiband operation. *IEEE Antennas and Wireless Propagation Letters*, 2009, vol. 8, p. 1029–1032.
- [24] ANGUERA, J., PUENTE, C. Shaped ground plane for radio apparatus. *Patent Appl. WO2006/070017*, Dec. 29, 2005.
- [25] ANGUERA, J., ANDÚJAR, A., PUENTE, C., MUMBRÚ, J. Antennaless wireless device. *Patent Appl. WO2010/015365*, July 2009.
- [26] ANGUERA, J., ANDÚJAR, A., PUENTE, C., MUMBRÚ, J. Antennaless wireless device capable of operation in multiple frequency regions. *Patent Appl. WO2010/015364*, July 2009.

- [27] ANDÚJAR, A., ANGUERA, J., PUENTE, C. Ground plane boosters as a compact antenna technology for wireless handheld devices. *IEEE Transactions on Antennas and Propagation*, 2011, vol. 59, no. 5, p. 1668–1677.
- [28] ANGUERA, J., PICHER, C., ANDÚJAR, A., PUENTE, C. Concentrated antennaless wireless device providing operability in multiple frequency regions. *Patent Appl. US61/671906*, July 2012.
- [29] ANGUERA, J., ANDÚJAR, A., GARCÍA, C. Multiband and small coplanar antenna system for wireless handheld devices. *IEEE Transactions on Antennas and Propagation*, 2013, vol. 61, no. 7, p. 3782–3789.
- [30] ANGUERA, J., PICHER, C., ANDÚJAR, A., KAHNG, S., PUENTE, C. Compact multiband antenna system for smartphone platforms. In *Proc. of the European Conference on Antennas and Propagation EuCAP*. Gothenburg (Sweden), April 2013.
- [31] SCHROEDER, W. L., FAMDIE, C. T., SOLBACH, K. Utilization and tuning of the chassis modes of a handheld terminal for the design of multiband radiation characteristics. *IEEE Wideband Multi-Band Antennas Arrays*, Sept. 2005, p. 117–121.
- [32] VILLANEN, J., OLLIKAINEN, J., KIVEKÄS, O., VAINIKAINEN, P. Compact antenna structures for mobile handsets. In *IEEE VTC2003 Fall Conference*. Orlando (Florida, USA), 2003.
- [33] VILLANEN, J., HOLOPAINEN, J., KIVEKÄS, O., VAINIKAINEN, P. Mobile broadband antennas. In *URSIGA 2005 Conference*. New Delhi (India), October 2005.
- [34] VILLANEN, J., OLLIKAINEN, J., KIVEKÄS, O., VAINIKAINEN, P. Coupling element based mobile terminal antenna structures. *IEEE Transactions on Antennas and Propagation*, 2006, vol. 54, no. 7, p. 2142–2153.
- [35] HOLOPAINEN, J., VILLANEN, J., ICHELN, C., VAINIKAINEN, P. Mobile terminal antennas implemented by using direct coupling. In *Proc. of the European Conference on Antennas and Propagation EuCAP*. Nice (France), November 2006, p. 1–6.
- [36] RAHOLA, J., OLLIKAINEN, J. Optimal antenna placement for mobile terminals using characteristic mode analysis. In *Proc. of the European Conference on Antennas and Propagation EuCAP*. Nice (France), November 2006.
- [37] VILLANEN, J., ICHELN, C., VAINIKAINEN, P. Coupling element-based quadband antenna structure for mobile terminals. *Microwave and Optical Technology Letters*, 2007, vol. 49, no. 6.
- [38] OZDEN, S., NIELSEN, B. K., JORGENSEN, C. H., VILLANEN, J., ICHELN, C., VAINIKAINEN, P. Quad-band coupling element antenna structure. *U.S. Patent 7 274 340*, Sep. 25, 2007.
- [39] HOLOPAINEN, J., VALKONEN, R., KIVEKÄS, O., ILVONEN, J., VAINIKAINEN, P. Broadband equivalent circuit model for capacitive coupling element-based mobile terminal antenna. *IEEE Antennas and Wireless Propagation Letters*, 2010, vol. 9, p. 716 to 719.
- [40] CABEDO-FABRÉS, M., ANTONINO-DAVIU, E., VALERO-NOGUEIRA, A., BATALLER, M. F. The theory of characteristic modes revisited: A contribution to the design of antennas for modern applications. *IEEE Antennas and Propagation Magazine*, Oct. 2007, vol. 49, no. 5, p. 52–68.
- [41] HAI ZHAO, GUI LIN, BECKMAN, C. Design of a coupling element based penta-band mobile phone antenna. In *Antennas and Propagation Conference LAPC 2009*. Loughborough (UK), November 2009, p. 209–212.
- [42] ANGUERA, J., PUENTE, C., BORJA, C., FONT, G., SOLER, J. A systematic method to design single-patch broadband microstrip patch antennas. *Microwave and Optical Technology Letters*, Nov. 2001, vol. 31, no. 3, p. 185–188.
- [43] ANDÚJAR, A., ANGUERA, J., PUENTE, C. A systematic method to design broadband matching networks. In *Proceedings of the 4th European Conference on Antennas and Propagation EuCAP 2010*. Barcelona (Spain), 2010.
- [44] RAHOLA, J., OLLIKAINEN, J. Analysis of isolation of two-port antenna systems using simultaneous matching. In *Proceedings of the European Conference on Antennas and Propagation EuCAP 2007*. Edinburgh (UK), November 11–16, 2007.
- [45] POZAR, D. M. *Microwave Engineering*. 2nd edition. John Wiley and Sons, 1998.
- [46] ANGUERA, J., ANDÚJAR, A. Ground plane contribution in wireless handheld devices using radar cross section analysis. *Progress In Electromagnetics Research M*, 2012, vol. 26, p. 101–114.
- [47] ROWEL, C., LAM, E. Y. Mobile-phone antenna design. *IEEE Antennas and Propagation Magazine*, Aug. 2012, vol. 54, no. 4, p. 14–34.

About Authors ...

Cristina PICHER was born in Sabadell, Barcelona, in 1984. She received her Technical Engineer Degree in Telecommunication Systems in 2006, her Engineer degree in Telecommunication in 2009, and her Master of Science in Telecommunication Networks in 2009, all of them from Ramon Llull University (URL, Barcelona). She began her investigation in miniature and multiband antennas in 2005 at Fractus (Barcelona) when she started her final degree projects in the Electronic and Telecommunication Dept. of URL in collaboration with the Dept. of Technology and IPR. In 2008 and 2009 she was awarded by the Ministry of Science and Innovation Spain: "Arquímedes" Introduction to Scientific Research program for her research in "Miniatute and multiband techniques combining handset antenna and ground plane design" and "Multiband handset antennas with slotted ground planes: human head interaction". From 2009–2012, she worked as a R&D Engineer in Fractus, where she was doing her Ph.D. in the field of small and multiband antennas for handset and wireless devices. In September 2010, she started leading projects in the antenna field for handset and wireless applications in a context of Industry-University collaboration between Fractus and the Dept. of Electronics and Communications of Ramon Llull University-Barcelona, Spain. In 2012, she joined Vodafone Spain, where she is working as a Design and Engineering Specialist in projects related to the deployment and optimization of the 3G/4G network. She has published more than 25 papers in scientific journals, international, and national conferences. She is author of 3 patents in the antenna field.

Jaume ANGUERA was born in Vinaròs, Spain, in 1972. He received the Technical Engineering degree in Electronic Systems and Engineering degree in Electronic Engineering, both from Ramon Llull University (URL), Barcelona, Spain, in 1994 and 1998, respectively, and the Engineering and Ph.D degrees in Telecommunication Engineering, both from the Polytechnic University of Catalonia (UPC), Barcelona, Spain, in 1998 and 2003, respectively. In 1997–1999 he joined the Electromagnetic and Photonic Engineering Group of the Signal Theory and Communications Dept. of the UPC as a researcher in microstrip fractal-shaped antennas. In 1999, he was a researcher at Sistemas

Radiantes, Madrid, Spain, where he was involved in the design of a dual-frequency dual-polarized fractal-inspired microstrip patch array for mobile communications. In the same year, he became an Assistant Professor at the Dept. of Electronics and Telecommunications, URL, where he is currently teaching antenna theory and electromagnetics. Since 1999, he is with Fractus, Barcelona, Spain, where he holds the position of R&D manager. At Fractus he lead projects on antennas for base station systems, antennas for automotive and currently managing handset and wireless antenna projects. His current research interests are multi-band and small antennas, broadband matching networks, diversity and MIMO antenna systems, electromagnetic dosimetry, genetic optimized antennas, and antennas for wireless devices. From 2003 to 2004, he was with Fractus-Korea (Republic South of Korea) as the leading manager for developing projects in the area of miniature and multi-band antennas for handset and wireless applications with Korean companies (Samsung and LG). Since 2001, he has been leading research projects in the antenna field for handset and wireless applications in a frame of Industry-University collaboration: Fractus and Dept. of Electronics and Telecommunications, Universitat Ramon Llull-Barcelona, Spain resulting in the direction of more than 70 bachelor and master theses, some of them awarded by Spanish institutions and companies. He holds more than 95 granted invention patents (most of them licensed) and 30 more pending patents in the antenna field. He is author of more than 170 journals, international and national and conference papers. He is a Senior Member IEEE. Dr. Anguera was member of the fractal team that in 1998 received the European Information Technology Grand Prize for the fractal-shaped antenna application to cellular telephony. 2003 Finalist to the Best Doctoral Thesis (Fractal and Broadband Techniques on Miniature, Multifrequency, and High-Directivity Microstrip Patch Antennas) on UMTS (prize awarded by Telefónica Móviles España). New faces of Engineering 2004 (awarded by IEEE and IEEE foundation). In the same year 2004, he received the Best Doctoral Thesis in "Network and BroadBand Services" (XXIV Prize Edition "Ingenieros de Telecommunicación") awarded by Colegio Oficial de Ingenieros de Telecommunicación and the Company ONO. He is a reviewer for IEEE Transaction and Antennas and Propagation, IEEE Antennas and Wireless Propagation Letters, IEEE Antennas and Propagation Magazine, Progress in Electromagnetic Research, IEE Electronics Letters, and ETRI journal (Electronics and Telecommunications Research Institute). He is editor of International Journal on Antennas and Propagation (IJAP). His biography is listed in Who'sWho in the World, Who'sWho in Science and Engineering, Who'sWho in Emerging Leaders and in IBC (International Biographical Center, Cambridge-England).

Aurora ANDÚJAR was born in Barcelona, Spain, 1984. She received the Bachelor's degree in Telecommunication Engineering specializing in Telecommunication Systems in 2005, the Master degree in Telecommunications Engineering in 2007 and the Master of Science in Telecommunication Engineering and Management in 2007, and the

Ph.D in Telecommunication Engineering in 2013 from the Polytechnic University of Catalonia (UPC), Barcelona, Spain. In 2004-2005 she received a research fellowship in the field of Electromagnetic Compatibility from the Signal Theory and Communications Dept. at UPC. In 2005 she worked as a Software Test Engineer for applications intended for handset wireless devices. In 2006 she worked as a Software Engineer designing a load simulation tool for testing Digital Campus in academic environments and developing improvements in the performance of web servers referred to the management of static and dynamics contents. From 2007 up to date she is working as R&D Engineer in Fractus, Barcelona, where she actively contributes to the prosecution and growth of the patent portfolio of the company. She is also involved in several projects in the field of small and multiband handset antenna design. Since 2009 she is leading research projects in the antenna field for handheld wireless devices in the collaborative university-industry framework. She has published more than 60 journals, international and national and conference papers. She is also author of 10 invention patents in the antenna field. She has directed 16 bachelor and master theses. Dr. Andújar is member of the COIT (Colegio Oficial de Ingenieros de Telecommunicación) and AEIT (Asociación Española de Ingenieros de Telecommunicación). She is editor of International Journal on Antennas and Propagation (IJAP).

Carles PUENTE was born in Badalona, Spain. He is a co-founder of Fractus and leads its antenna technology research team, with responsibility for the company's intellectual property portfolio development and antenna development. Carles is a university professor at the Universitat Politècnica de Catalunya (UPC) where he started researching fractal-shaped antennas while a student in the late 1980s. He gained his MSc from the University of Illinois at Urbana-Champaign, USA in 1994 and his PhD from UPC in 1997. From 1994 to 1999 he worked with the Faculty of Electromagnetic and Photonic Engineering at UPC on pioneering developments of fractal technology applied to antennas and microwave devices. Dr. Puente was awarded with the Best Doctoral Thesis in Mobile Communications 1997 by the COIT, the European Information Society Technology Grand Prize from the European Commission in 1998 and the Premi Ciutat de Barcelona in 1999. He and his team at Fractus were awarded with the Technology Pioneer distinction by the World Economic Forum in 2005. He has authored more than 50 invention patents and over 90 scientific publications in fractal and related antenna technologies.

Adrián BUJALANCE was born in Esplugues de Llobregat, Spain, in 1984. He received the BSc in Telecommunication Engineering from Universitat Ramon Llull - La Salle, Barcelona, Spain, in 2013, where he is currently working toward the MSc in Telecommunication Engineering. Since 2010, he has worked as a research collaborator at the Technology & IPR Dept. of Fractus. He has published 5 journal papers. His research interests include design and implementation techniques of compact radiating systems for mobile handset devices.