

# Why it's so hard? Exploring social barriers for the deployment of thermal energy storage in Spanish buildings

*M. Simó-Solsona<sup>a</sup>, M. Palumbo<sup>b,c\*</sup>, M. Bosch<sup>c</sup>, A.I. Fernandez<sup>d</sup>*

*a Department of Sociology, Universitat de Barcelona, Av. Diagonal 696, Barcelona 08034, Spain*

*b Department of Chemical Engineering, Universitat Rovira i Virgili, Av. Països Catalans, 26, Tarragona 43007, Spain*

*c Barcelona School of Building Construction (EPSEB), Universitat Politècnica de Catalunya, Av. Doctor Marañón 44, Barcelona 08028, Spain*

*d Department of Materials Science and Physical Chemistry, Universitat de Barcelona, Martí i Franqués 1-11, 08028 Barcelona, Spain*

## Abstract

Thermal energy storage (TES) has been a prominent topic of scientific and industrial research for the last decades as TES increases efficiency, reliability and economic feasibility of solar energy systems. Several TES technologies are today feasible and competitive from a scientific-technical, sustainable and economic point of view. However, the social awareness and acceptance of TES has not followed such a development, as socio-cultural and legal aspects to be considered for their broader implementation hinder it. The main objective of this paper is to analyse social and cultural barriers to TES adoption in the Spanish context. For this proposal, we use quantitative and qualitative data provided from professionals and experts of the building sector. Hereby the main ideas arising from the analysis: the economic crisis of 2008 and the poor condition of the existing building stock prevent the adoption of extensive retrofitting measures including energy efficiency solutions such as TES' while TES is regarded as an emerging market in Mediterranean climates such as Spanish. The lack of expertise of professionals hinders the transmission of TES benefits to occupants. Besides, there is little dissemination of good practices and professionals are suspicious of the long term performance of such technologies.

**Keywords:** thermal energy storage, mixed methods, social acceptance, building, energy efficiency, energy retrofitting

## 1. Introduction

Thermal energy storage (TES) has been a prominent topic of scientific and industrial research for the last decades. The number of scientific publications has increased six-fold [1], and the installed power has increased from 0.1 GW to 3.2 GW between 2007 and 2017 worldwide [2]. Research on TES has mainly focused on its technical feasibility, moving from the characterisation and optimisation of conventional heat storage materials to the design of a next generation of TES materials with larger operation temperature ranges and greater storage capacity. With time, the focus has also been on the study of the economic viability and on the sustainability of TES [3] which has led to the emergence of several TES technologies that are currently feasible and competitive from the scientific-technical, sustainable and economic point of view.

TES is a term encompassing a wide range of technologies aimed at the storage of heat for its later use in heating and cooling applications and power generation. Depending on the storage principle, it is possible to distinguish between sensible heat storage, latent heat storage and thermochemical storage technologies. Sensible heat storage and latent heat storage are the more commercially developed to the date. In sensible heat storage, heat is stored by changing the temperature of a storage medium, generally water and molten salt mixtures. In latent heat storage, heat is stored

1 through a phase transition, usually solid to liquid and vice versa. The so called phase change  
2 materials (PCM) such as paraffin or sugar alcohols are used in latent heat storage.  
3 Thermochemical heat storage has shown a higher potential for storage density, but further  
4 research is needed to demonstrate its feasibility [1].  
5

6 The main feature of TES lies in that it can provide flexibility to solar energy systems by  
7 overcoming discordances in time, temperature, power or location between energy production and  
8 use. This improves both efficiency and reliability of such systems, leading to a significant  
9 reduction of costs and environmental impacts. This is true for both PV and thermal distributed  
10 solar energy production, as energy in buildings is mainly used in the form of heat. Although PV  
11 systems can be coupled to electric batteries, current technologies lie in scarce raw materials and  
12 involve high investment and environmental costs, which makes TES an attractive alternative.  
13 According to IRENA's last report [4], TES technologies and systems with different operational  
14 temperatures and requirements can meet a range of needs in the buildings sector. This is why TES  
15 is regarded as a key element in the energy transition towards renewable sources [5,6]. TES has  
16 also been proved to significantly reduce the energy demand of buildings if properly incorporated  
17 within building components such as walls, windows or slabs. This application is attractive as the  
18 building sector is currently responsible for 36% of global final energy consumption and nearly  
19 40% of total direct and indirect CO<sub>2</sub> emissions and has a great potential for energy demand  
20 reduction [7]. These figures are a bit lower in Spain (about 20% of final energy consumption is  
21 due to buildings), but are rapidly increasing according to the predictions of the Institute for the  
22 Diversification and Saving of Energy (IDAE) [8]. This clearly underlines the relevance of  
23 introducing technologies such as TES for Spanish economy, highly dependent from external  
24 energetic sources. In consequence, construction sector has a key role in this challenge.  
25  
26  
27

28 Although a wide range of TES technologies for buildings exist, these can be classified into two  
29 main groups, namely active storage systems and passive storage systems. Active storage systems  
30 require an energy input to force convection heat transfer. In turn, in passive storage, solar  
31 radiation, natural convection or temperature difference provide convection heat transfer. Active  
32 TES can be integrated in the core of the building (e.g. thermally activated floors and walls, where  
33 thermal energy is transferred to a slab or wall with high thermal mass -usually using water as  
34 transferring element- where heat is stored for some time -minutes or hours- before being emitted  
35 to the indoor environment), in the building envelope (e.g. suspended ceilings) or, in HVAC  
36 systems (either in ducts, in air-handling units or in other parts of the system) or in photovoltaic  
37 (PV) systems [9]. Passive TES, in turn, occurs in massive walls and floors built using high thermal  
38 mass materials (such as earth, stone or concrete); in solar walls (such as Trombe wall or solar  
39 water wall); or in building components incorporating phase change materials (PCM), either inside  
40 the material or in its porous structure, or as a separate layer in the construction solution [10]. In  
41 turn, it is possible to distinguish three groups TES technologies on the basis of their maturity:  
42 traditional technologies, which have been used in traditional architecture systems, such as massive  
43 walls, modern but mature technologies (e.g. Trombe wall) and innovative or unproven systems  
44 (such as PCM). The first are mostly passive systems while active systems are usually modern and  
45 innovative solutions.  
46  
47  
48  
49

50 Moreover, depending on the needs, TES for building applications can be sized for short periods  
51 (hours) to seasonal storage and in a range of scales, from domestic to local and territorial [9].  
52 Examples of domestic set-ups are phase-change materials incorporated in building components  
53 as paints or facades, while water tanks for seasonal heat storage are an example of macro-scale  
54 TES systems. For more detailed information on these technologies see [9,10].  
55  
56

57 Despite the scientific and technological development of TES and its forefront mentioned  
58 advantages, its market penetration is not as widespread as it might be expected. According to the  
59 DOE Global Energy Storage Database, the global operational TES capacity at the time of this  
60  
61  
62  
63  
64  
65

1 writing is only the 1.9% of the total world energy storage capacity. Spain is the country with a  
2 larger implementation of TES, followed by US and India, but still with a modest share of 14% of  
3 the total energy storage capacity of the country, which is estimated in 8.1 GW [2].

4 This mismatch between technology development and actual implementation of TES may be  
5 explained by socio-cultural factors. The analysis of socio-cultural and legal aspects influencing  
6 social acceptance of TES has been overlooked to date despite the fact that several works have  
7 pointed out its importance to boost its further implementation in the building sector [11–14].  
8 Neglecting this aspect in energy system change strategies can lead to misguiding of policy making  
9 and practice and to a further resistance towards the assimilation of new technologies. Research  
10 has reported behavioural aspects such as the “rebound effect” [15,16] which can reduce the  
11 benefits of energy efficient interventions up to 30% if not taken into account from early stages of  
12 design. As the rebound-effect may cause demand shifting or amplifies the original system peak,  
13 the design of the TES system with the adequate control may mitigate it.  
14  
15

16 D’Oca et al. [14] analysed the outcomes of several EU funded projects dealing with energy  
17 retrofitting of buildings. The authors identified technical, financial and social barriers that explain  
18 why, despite the efforts made, only 1% of the EU existing building stock has been energy  
19 retrofitted to the date. These barriers were identified thanks to the outcomes of a focus group  
20 joining several stakeholders that took place at the Sustainable Places Conference 2018. Among  
21 the social barriers identified are (1) complex decision-making processes; (2) misunderstanding  
22 between residents; (3) disturbances during the site works; (4) limited awareness on energy and  
23 non-energy benefits; and (5) poor communication between stakeholders. The authors pointed out  
24 the need to create a demand from the market and the project level to boost investment in building  
25 renovation. In this vein, other studies also pointed out an “information deficit” and the “not in my  
26 back yard” position as important social barriers for energy system change strategies [17,18].  
27  
28  
29  
30

31 Devine-Wright et al. [13] suggested an interdisciplinary methodology for the analysis of social  
32 acceptance of energy storage taking into account the role of the diverse actors at local, national  
33 and international scale. Authors stress the significant role played by belief systems from key  
34 actors, in our case, practitioners, to understand and argue social acceptance in renewable energy  
35 storage solutions. Their approach followed the triple dimension of social acceptance proposed by  
36 Wüstenhagen et al. [19] (that is governance and regulation, markets and innovation and socio-  
37 cultural and public acceptance aspects) but put more emphasis on the analysis of the interrelations  
38 between the stakeholders at different geographical scales.  
39  
40

41 Hu et al. [15] conducted an online survey on about 5.000 households in China to investigate,  
42 among others, the awareness and reaction of end users to existing energy efficiency policies. The  
43 survey revealed that energy efficiency behaviour and awareness is shaped mainly by what users  
44 have learned from their academic and professional environments and from their traditional  
45 energy-saving habits. It is remarkable that these factors were found to be more influential than  
46 economic concerns.  
47  
48

49 The main objective of this paper is to identify existing barriers, especially social, hindering the  
50 implementation of TES in buildings. The authors’ hypothesis is that having such a diagnosis  
51 should help to define paths to overcome these limitations and boost the widespread use of TES in  
52 buildings. In Section 2 we describe the quantitative survey and the focus group designed to gather  
53 quantitative and qualitative information from stakeholders related to TES. In Section 3 the  
54 penetration of TES in the Spanish building sector is discussed, while in Section 4 we outline the  
55 main barriers to a wide adoption of TES. Finally, the conclusions resulting from the field work  
56 are presented in Section 5.  
57  
58  
59  
60  
61  
62  
63  
64  
65

## 2. Methodology

Aiming at the identification of social barriers of TES, we undertook a mixed perspective. From one hand, a quantitative survey among the professionals of the building sector, specially building engineers and architects, which are the decision makers regarding the energy strategies implemented in buildings. From the other hand, a focus group involving experts from the private and public sector, representatives of professional associations and teaching institutions. The analysis was limited to the region of Catalonia, Spain.

We designed a web-based questionnaire to collect the experience of professionals in the building sector on the use of TES (see Table A1 in the Annex). The focus was put on finding out the main barriers for implementation of TES among the professionals in the building industry. The questionnaire was carried out on-line and distributed through the communication channels of professional associations in Catalonia (CAATEEB and COAC)<sup>1</sup> from May to October 2018. The snowball sampling method implemented took advantage of the existing networks within the sector, aiming at any participant regardless their professional role or position [20]. The survey was divided into three sets of questions. The first was aimed at the collection of data showing what the general awareness in TES technologies was, and building energy efficiency of the respondents. In the central part, professionals were asked about their personal experience regarding the use of TES, thermal insulation and other available technologies for the energy efficiency of buildings. Special emphasis was made on energy retrofiting as this was the main activity for most professionals in Spain after the economic downturn that severely hit the sector in 2008 [21]. The final part was focused on getting some demographic information of the respondents such as age, professional profile or educational background to construct a sociodemographic of the sample.

In order to complement the quantitative perspective, a focus group was organised. This participatory method from qualitative approach is suitable to discuss new fields and gain insights through the reactions from interpersonal dynamics identify reactions from each participant [22]. It took place on the 14<sup>th</sup> March 2019 and gathered together eight practitioners with distinct profiles and contrasted experience on TES and building energy performance. The discussion was organised in three major parts (see Table A2 in the Annex): a) Energy refurbishment policies. In this block, the discussion was focused on identifying barriers to the implementation of building energy refurbishment policies as well as unravelling the reasons behind the scarcity of energy rehabilitations undertaken so far in Spain; b) Energy refurbishment practice. The experts were asked to share their experiences in energy refurbishment stressing common difficulties and potential improvement measures. Finally, c) Thermal energy storage (TES). In this block, the use of TES was discussed. The debate was centred on how these technologies are being assimilated by the sector, the awareness of practitioners and the factors that may prevent the widespread use of such technologies in construction. The focus group was recorded (under permission) and was transcribed literally. Content analysis was done in order to obtain relevant information following the previous identified concepts (theoretical saturation).

### 2.1. Demographic and social profile of the participants

The survey obtained a sample of 146 respondents. Mostly of them were professionals actively practicing while 5% were retired. Most of the respondents (56%) were in a mature period of their

---

<sup>1</sup> CAATEEB: Col·legi d'Aparelladors, Arquitectes Tècnics i Enginyers d'Edificació de Barcelona (Association of Building Engineers of Barcelona) and COAC: Col·legi d'Arquitectes de Catalunya (Catalonia Association Architects).

1 professional careers (between 40 and 60 years), while young architects under the age of 30 and  
2 senior architects over the age of 60 were the populations with lower number of respondents (6%  
3 and 15% of the total respectively). Regarding their professional activity, 25% of the respondents  
4 were project designers or engineers, 20% construction managers and 11% project managers, all  
5 of them roles with responsibility regarding the definition of the energy efficiency strategies in  
6 buildings. We found that 14% of the respondents were from academia or gave courses in training  
7 institutions, which doubles the Spanish ratio among architects (7%) [23].

8  
9 From the point of view of the background training and specialization it was found that most of  
10 the respondents were experts or had a high awareness in issues related to energy efficiency of  
11 buildings. The majority of them (76%) declared to have been following some kind of training  
12 related with this issue, a percentage much higher than the Spanish average (37%) [23]. This is  
13 probably due to the fact that professionals already interested in this topic were more motivated to  
14 take the survey.  
15

16 Participants of the focus group are eight practitioners with distinct profiles were chosen for their  
17 level of knowledge and contrasted experience on TES and building energy performance, and do  
18 necessarily represent the overall population of stakeholders [20]. The profiles chosen were: two  
19 representatives from the professional order CAATEEB, from the technical and training areas (P1  
20 and P2); an academic teaching at the school of architecture of Barcelona (P3); a representative  
21 from the Housing Agency of the Catalan administration (P4); a practitioner from a company  
22 specialized in facade renovation (P5); a representative of a building sustainability consulting firm  
23 (P6) and two researchers in the field of TES and energy efficiency of buildings (P7 and P8).  
24  
25  
26

### 27 **3. Penetration of TES in the construction practice**

28  
29 Aiming at the evaluation of TES implementation, the focus was put on the experience from  
30 practitioners in building retrofitting rather than on new construction. This profile is predominant  
31 after the bursting of the real estate bubble in 2008, when Spanish construction sector was hit by a  
32 dramatic downturn. The number of new building licenses reduced from 96,626 in 2007 to 35,692  
33 in 2010. As a result, building retrofitting took on greater prominence, from 25% of total building  
34 licenses (excluding demolitions) in 2007 to 46% in 2010 and 52% in 2017 [21].  
35  
36

37 The participants were asked if they had been involved in any building retrofitting project  
38 including energy upgrades in the last five years. 60% of professionals confirmed their  
39 participation in such projects, three out of five of which were in the preceding two years. The  
40 refurbished buildings were dwellings in most of the cases, mostly single-family dwellings  
41 privately owned. Public facilities corresponded to 20% of the cases. Almost all the interventions  
42 were made on buildings built before 2006, when the Spanish Building Code (CTE) entered into  
43 force, of which 52% were on buildings built before 1960.  
44  
45

46 Of the 71 energy renovations reported, 75% included thermal insulation of envelopes and window  
47 replacement. Only 12.6% of the reported refurbishments included seven or more of the  
48 intervention activities proposed in the questionnaire (see Figure1), which points out a scarcity of  
49 in-depth refurbishments. As shown in Figure 1, which shows the frequency of the most common  
50 activities in building energy refurbishment, other improvements of great impact on energy  
51 efficiency such as control of thermal bridges and control of ventilation and infiltration rates were  
52 undertaken only in 4.3% and 10.4% of the cases. The use of TES is even rarer, as it can be deduced  
53 from the fact that only 3% of the interventions included any consideration to the thermal inertia  
54 of the building. The incorporation of renewable energy sources, which commonly includes the  
55 use of thermal storage in water tanks, was found not to be any common either.  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

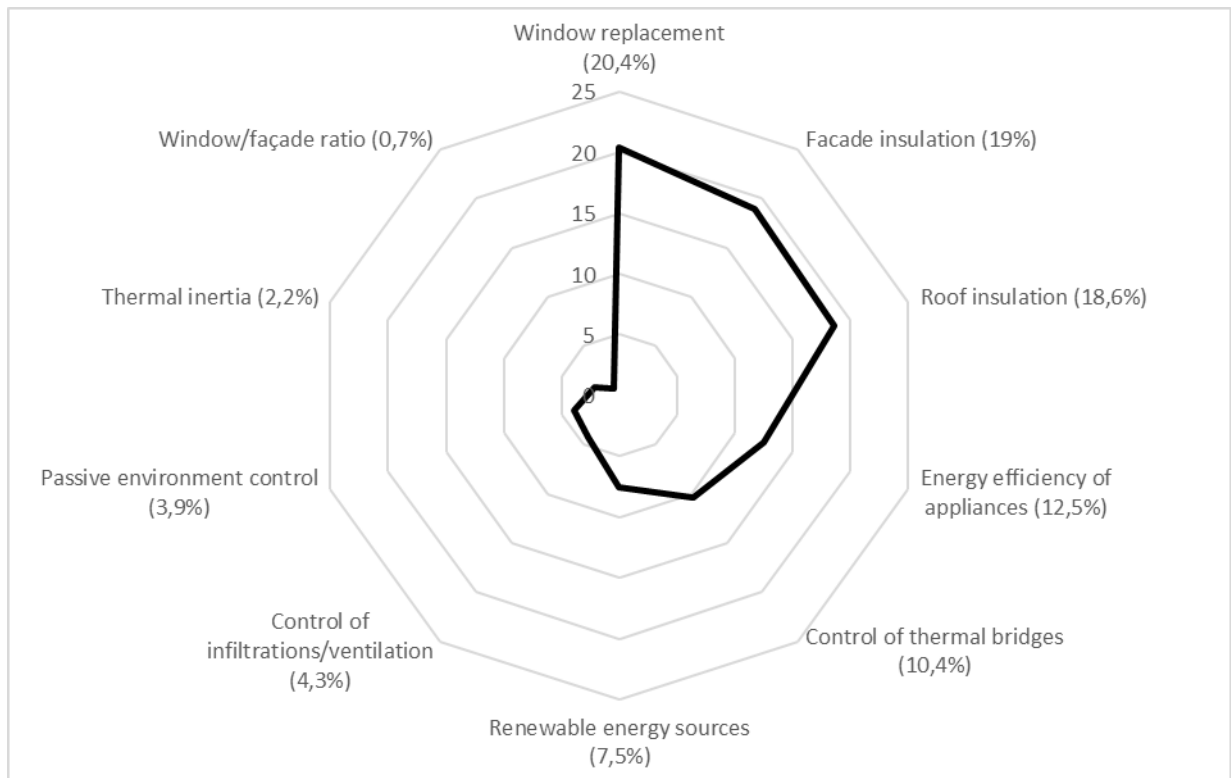


Figure 1. Most common energy refurbishment interventions. Source: Survey on TES awareness, 2018 (% of responses).

Regarding the application of TES, the professionals were asked about three specific technologies: water tanks, phase change materials and Trombe walls. The results showed that only 42% of the respondent had used water tanks in any of their projects, mainly in sanitary hot water facilities (50%) and solar energy systems (36%).

In brief, the results of the survey show that most of building energy retrofitting activities are small (mostly single-family dwellings) and limited, mostly including envelope insulation and window replacement only. Other interventions, such as control of ventilation or the use of TES, are not considered in the strategies for energy improvement. These results are aligned with the ideas raised by the focus group, in which the participants noted a low adoption of TES and, in general of building energy retrofitting in the Spanish context and pointed out some possible reasons behind this fact, which are discussed in the next section.

#### 4. Barriers to TES acceptance

The analysis of the data from the focus group led to the identification of two groups of barriers. A first group referred to TES technologies but also to other technologies that also aim at the energy performance of buildings, but are not based in TES. A second group was specific for technologies based on TES. The first are depicted in sub-section 4.1 and the second in 4.2.

Notice that TES is a generic term that clusters various types of technologies, from PCMs in plaster panels to water tanks in solar energy systems. The barriers presented may apply in some of the cases but not the others. For instance, a technical barrier highlighted was the large space demanded by these technologies. This is true for water tanks or walls with high inertia, but obviously not for plaster panels incorporating PCMs.

## 4.1. General barriers for technologies aiming at energy efficiency of buildings

Several barriers to the widespread adoption of energy efficiency technologies (EET) were identified during the focus group. These were clustered into three groups: economic, technical and social barriers (see Figure 2). This clustering is proposed by the authors based on the results of the field work and adapting the classifications proposed by Devine-Wright et. al. [13] and Wustenhagen et al. [19]. Notice that although the focus of this research was on social barriers, economic and technical barriers were also included for contextualization and to provide an integral approach to the complexity of the object of study. In turn, social barriers were grouped into three levels according to the degree of proximity to the occupants, which were considered as final beneficiaries of EETs: contextual, regulatory and project level. The contextual level clusters macro difficulties derived from the economic, social and structural context. The regulatory level is a meso level including barriers related with the role of the administration and other stakeholders not in direct contact with the final beneficiaries. Finally, the project level includes all barriers related to the design and construction of specific projects, which directly affect the final beneficiaries.

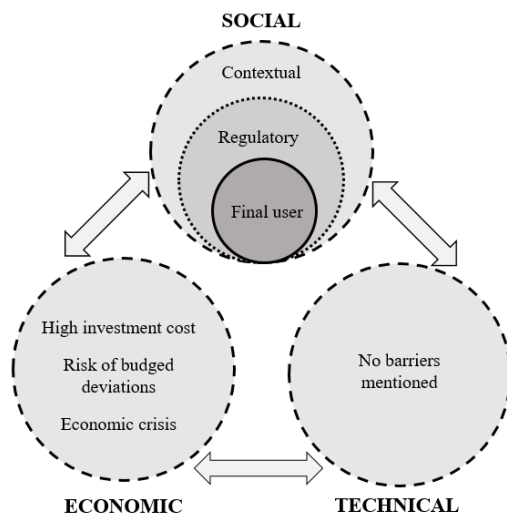


Figure 2. Clusters of identified barriers for EET.

### 4.1.1. Economic and technical barriers

The main economic barrier mentioned was the high initial cost of the interventions, which results in long pay-back periods. According to the focus group, even if rigorous calculations on energy savings and pay-back periods can be made in the design phase, a poor construction quality control can add a considerable degree of uncertainty to such calculations, which reduces owners' willingness to put in energy retrofiting. This reluctance is reinforced in a context of economic crisis such as the one hitting Spain since 2008, which has heavily affected the construction sector. It is also more common in the case of neighbourhood communities where the need to reach an agreement between all parties often tilts the choice towards the cheapest budget.

Technical barriers, in turn, do not seem to be a main concern among the professionals as these were not highlighted in the focus group.

#### 4.1.2. Social barriers

The social barriers compiled from the discussion group are summarised in Table 1. As mentioned before, these are classified into macro, meso and micro levels according to their direct influence on final users.

Table 1. Social barriers for Energy Efficiency Technologies (EES).

a. Contextual level	b. Regulatory level	c. Project level
<b>Ownership type.</b> Tenure is strengthened against rent which hinders coordinated interventions	<b>Confusing regulation and unclear objectives.</b> Generating confusion among professionals in the sector.	<b>Need of an integral approach.</b> Professionals need to work in multidisciplinary teams to deal with complexity.
<b>Economic recession (2008).</b> Occupants and landlords adopt more conservative attitudes. Public funding support is constricted.	<b>Poor coordination between administrations.</b> Hinders a holistic view of the stakeholders.	<b>Not a prime concern.</b> Energy efficiency and associated technology is not a priority for the stakeholders in the construction sector.
<b>Building stock ancient and poorly maintained.</b> Addressing structural and safety interventions is regarded as a priority.	<b>Regulations not adapted to the context.</b> They are directly transposed from European directives without any debate on the contextual specificities.	<b>Lack of knowledge.</b> The awareness of the key actors (promoters, practitioners and administration) on building energy efficiency is low.
	<b>Lack of awareness.</b> Lack of a clear commitment to improve the energy efficiency of the building stock.	<b>Poor motivation.</b> Key actors are not convinced and are not encouraged to promote energy efficiency of buildings.

#### a. Contextual level: the influence of Spanish tenure system

One of the cited barriers in the contextual level was the Spanish tenure system, in which users are encouraged to own rather than to rent their homes. This hinders the possibility of a coordinated intervention in the existing stock. In multi-family dwellings, it is often challenging for the communities of neighbours to coordinate interventions. The intervention in common areas, the ownership of which is shared, is not regarded as an individual priority. Administration only manages public housing, which represents in Spain less than the 2.5% of the dwellings [24]. Stablishing a minimum consensus is the first step and it is probably the most challenging one for the communities.

Another added contextual factor was also considered: the influence of the economic recession that took place in 2008. Since then, the investment in building retrofitting has been dramatically reduced. In such context, only the most urgent structural deficiencies are addressed due to budget constraints and the lack of subsidies offered by the administrations. Energy efficiency retrofitting measures are set aside, as they are not considered essential.

*(...) Energy refurbishment is a very small part of our list of works (...) I wonder if it's due to a lack of awareness in the communities, obviously we come out from a time of crisis which has done much harm in the type of works undertaken in retrofitting and refurbishment. (...) The fact of going only minimums has made it hard to envisage these kinds of refurbishments, which are very expansive, of considerable cost, when it comes to existing buildings. (P5)*



1 To this economic context must be added the fact that the existing building stock, both public and  
2 private, present severe structural and safety deficits that need to be addressed. While this could  
3 be an opportunity for EET, the reality is that refurbishments are done only when the need is urgent  
4 and often EET do not fit in the budget.

5 *What the Agency is doing now, (refers to the Housing Agency of the Generalitat de*  
6 *Catalunya) besides making housing policy, is promoting rehabilitation through the ITs,*  
7 *technical inspections (of buildings). They are aimed at urgent cases or buildings aged over*  
8 *40. Raising issues of energy rehabilitation there I think is complicated, because communities*  
9 *of neighbours have a lot of work to do in agreeing to repair the damage they have and the*  
10 *pathologies showing up after 40 years. (P4)*

### 13 **b. Regulatory level: drawing a confusing scenario/background**

14  
15 This intermediate level refers to the role of administrations and other stakeholders that react to  
16 the contextual effects and, with their actions (generally regulatory), generate an effect on the final  
17 users. Four major barriers were found at this level, interacting with each other: (1) confusing  
18 regulation and unclear objectives; (2) poor coordination between administrations, (3) a regulation  
19 body not adapted to the context and (4) lack of awareness of the importance of building energy  
20 retrofitting.  
21

22  
23 According to the focus group, Spanish professionals have to deal with a confusing regulation  
24 framework arising from a refurbishment policy with unclear objectives. This condition was also  
25 mentioned by Wüsterhagen et al. [19] when analysing other contexts, and it is mostly due to the  
26 existence of many administration bodies with competencies in the energy retrofitting sector. The  
27 diverse levels of administrations concerned (local, autonomic and national) are poorly  
28 coordinated and communicate ineffectively, which hinders the implementation of comprehensive  
29 energy efficient measures.  
30

31  
32 *(...) Then a further issue that we should be clear about our country: is the level of*  
33 *segmentation of administrations which makes it very difficult to know who it who, who has*  
34 *said what, where the funding will come from, etc. Things are at the state level, others at the*  
35 *regional, and others at the municipal... this is tricky. Above all with regard to a key issue:*  
36 *financing. (P2)*  
37

38  
39 Indeed, the outcomes of the survey showed that despite the high cost of energy retrofitting, public  
40 financial support was asked in only 25% of the cases reported, from which the half where finally  
41 granted.  
42

43 Professionals also miss a clear regulation adapted to the Mediterranean context. They claim that  
44 the models of Northern Europe should not be directly adopted, as the climatic and cultural  
45 conditions differ. At the same time, a clear role is called for from the administrations, which  
46 should clearly establish the goals to be achieved. In addition, a greater dissemination of the best  
47 practices is requested, as a complement of the existing regulatory frame.  
48

49  
50 *You talk about consciousness at the bottom, but what about the top? Are energy*  
51 *refurbishment policies clear? Which ones are they? They're not clear indeed. Let me*  
52 *explain. First, if we focus on Catalonia and look at the Energy Plan or the National*  
53 *Energy Transition Agreement ... I do not know yet what the priority is: is it mobility?*  
54 *Energy rehabilitation? I see that they talk about many things, in the Energy Plan for*  
55 *Catalonia for example, it describes what happening in England and what Shell says, but*  
56 *what about we want, in our framework, which is the Mediterranean and is so different*  
57 *from Northern Europe? I have no idea. Then we will have to talk about how we have to*  
58 *do it. But if we are not clear about the What first, we will hardly discuss the How. (P2)*  
59  
60  
61  
62  
63  
64  
65

1 The forefront mentioned elements add to a lack of awareness at the administration level. This lack  
2 of awareness is reflected in uncomprehensive priorities and regulations non adapted to the  
3 contextual needs. This leads to a lack of clear commitment to energy sustainability of buildings.

#### 4 **c. Project level: not a prime concern**

5  
6 Barriers observed at the project level can be organized in two groups: at the side of practitioners,  
7 a lack of holistic viewpoint, as well as a lack of building maintenance and management planning  
8 were highlighted. Deficits in training on how to raise awareness on energy innovations were also  
9 mentioned. At the level of occupants, the main barrier noticed was the fact that energy efficiency  
10 is not considered a priority. Finally, lack of awareness was common to both groups and results in  
11 poor motivation.  
12

13  
14 The discussion group pointed out the need of multidisciplinary teams capable to deal with the  
15 complexity that energy retrofiting interventions demand. Contributions from multiple disciplines  
16 allow for more efficient projects where all kind of aspects, not just the technical ones, are taken  
17 into account:  
18

19 *(...) I think that one of the barriers identified is that energy refurbishment needs*  
20 *multidisciplinary teams. If we each stay in our own field, it is hard to overcome it*  
21 *(referring to energy efficient interventions). Since the funding is so high, you need to have*  
22 *bankers on your team. (P4)*  
23

24  
25 This lack of integral vision has a direct impact on the end users. Often their needs in terms of how  
26 they will use the building are ignored and so is the management of the building after the  
27 intervention:  
28

29 *(...) one of the most important points related to motivation or awareness is that not enough*  
30 *thought is given to the ones that will manage the building. (P2)*  
31

32  
33 The above mentioned aspects are related to a further challenge: benefits of undertaking energy  
34 upgrades, which includes energy and economic savings but also improved thermal comfort, are  
35 not effectively passed from the experts and practitioners to the owners, which is key in raising  
36 social awareness. As a result, owners often disregard energy efficiency interventions compared  
37 to other upgrades considered of higher priority, namely repairs and maintenance.  
38

39 *Currently no-one shows them [referring to occupants]: if we do so, what will you save? In*  
40 *the short term? In the long term? We are not trained to do this. According to my experience,*  
41 *neither the project managers nor the construction companies. Then, when it comes to works,*  
42 *it is nowadays hard to apply. You may do an ETICS and little else. (P5)*  
43

44  
45 Two other closely related barriers were brought up: the general lack of awareness and the lack  
46 of motivation of both practitioners and occupants. This idea is reinforced by the results yielded in  
47 the survey. It is not only a shared vision (74% of the respondents believe that the building sector  
48 does not give priority or is neutral to issues related to energy efficiency), but also an attitude in  
49 the daily practice of most of the respondents.  
50


51  
52 For example, when respondents were asked about what are and how they select the insulation  
53 materials for their projects, in most cases environmental aspects lag far behind technical aspects.  
54 Polystyrene and mineral wool are the insulators most commonly installed and are also the most  
55 commonly recommended by manufacturers and installers. When asked about the factors  
56 considered in the choice, thermal conductivity and cost were the most cited factors. In third place  
57 were fire performance (14%), durability (12%) and acoustic properties (9.3%). The respondents  
58 attached little or no attention to environmental aspects such as bio-degradability, fume or dust  
59 emissions or embodied energy of insulation materials, which fell to the bottom of the list.  
60  
61  
62  
63  
64  
65

1 This contrasts with their ideological positioning. When asked in general terms, the respondents  
2 argue that environmental aspects should be given more attention. For instance, in 68% of the cases  
3 they considered that waste disposal of building materials is a highly relevant issue that should be  
4 considered more seriously. The mismatch between the ideological positioning and the factors  
5 influencing design choices does not seem to be due to the influence of other decision makers, as  
6 the respondents claimed to be in charge of making this decision in 60% of cases. The explanation  
7 given in the focus group to this situation is a generalised poor motivation to tackle the existing  
8 challenges.  
9

10 *(...) But when it comes to energy improvements in a project, my colleagues find that it is*  
11 *adding complexity, more work, obviously, and as it does not have immediate results, as it*  
12 *does not translate into a higher revenue per square meter when the work is finished, it*  
13 *does not make sense. And this has happened in façade interventions, window substitution,*  
14 *energy recovery... We had the money... (...) Therefore, I would say that we need more*  
15 *awareness and that the key word is motivation. (...) It is challenging: it is not training, it*  
16 *is not just the role of the administration or the [lack of a] roadmap, which I find very*  
17 *important; it is something more personal. (P6)*  
18  
19

## 20 4.2. Specific barriers to TES technologies

21  
22 In section 4.1 the challenges of energy efficiency interventions in buildings (including the use of  
23 TES but also other technologies) were discussed. In this section specific barriers to TES are  
24 introduced. As in the previous section, barriers are classified into three main groups: economic,  
25 technical and social (see Figure 3).  
26  
27

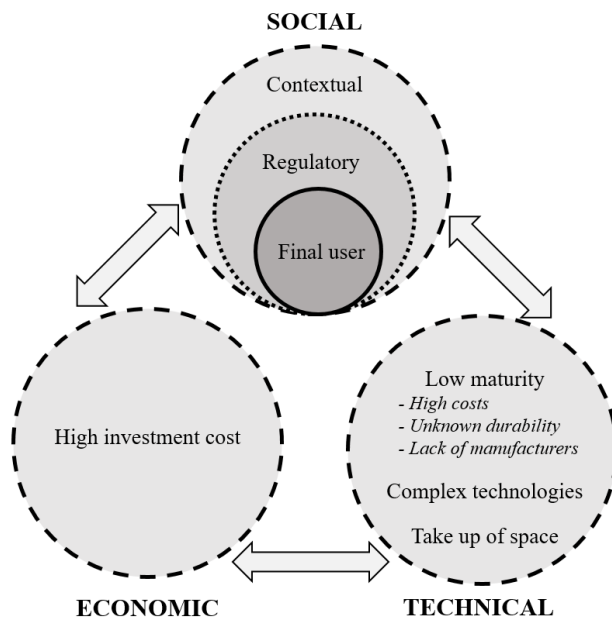

28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51 *Figure 3. Clusters of identified barriers for TES.*

### 52 4.2.1. Economic and technical barriers

53  
54  
55 According to the focus group, the main barriers hindering a wider implementation of TES are  
56 related to the fact that it is incorporated in technologies that have been in the market for a short  
57  
58  
59  
60  
61  
62  
63  
64  
65

1 time. The implications are two-fold: higher costs, due to underdeveloped economy of scale and  
2 little evidence about long-term performance and durability.

3 *(...) I think that we still have some way to go to deploy these options. For [thermal]  
4 storage, some studies exist, and as far as I know the issue is cost and durability (...). How  
5 many times can a material change [phase] before being damaged? This must be taken  
6 into account in designs too. (P3)*  
7

8 Another consequence derived from an immature market was identified in the survey: the scarcity  
9 of manufacturers and distributors offering TES technologies was placed in sixth place in the list  
10 of barriers for TES, as shown in Figure 4.  
11

12 From the results of the survey it is noticeable that, in contrast to what was observed for energy  
13 efficiency technologies, the technical aspects are a concern among professionals. In particular,  
14 one half of the respondents argued that the fact that TES usually takes up more space limits their  
15 implementation, especially in renovations; and more than one third highlighted complexity in  
16 design as a remarkable technical barrier for TES. These results match with the opinions expressed  
17 in the focus group, where space requirements and complexity in design were also pointed out as  
18 main technical barriers.  
19

20 Experts from focus group argued that complexity is due to the fact that the performance of TES  
21 is closely related to climate conditions and must be evaluated taking into account daily and  
22 seasonal evolution of environmental conditions or the time that it takes to the building to come  
23 into operation, among others.  
24

#### 25 4.2.2. Social barriers

26 Although technical barriers mentioned above were identified as relevant impediments for the use  
27 of TES, the barrier mentioned by most of the respondents of the survey was the lack of knowledge  
28 of the practitioners. The participants were asked about the main reasons for the limited use of TES  
29 in façades (such as PCM, massive walls or Trombe walls) compared to the use of alternative  
30 technologies such as thermal insulation. The results are shown in Figure 4. Three quarters  
31 identified lack of knowledge as the main impediment. Lack of regulations and lack of demand  
32 from customers and promoters were also chosen in 34% of the cases. The same was asked in the  
33 case of roofs (that is technologies such as PCMs, rain tank roofs and green roofs) yielding similar  
34 results.  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

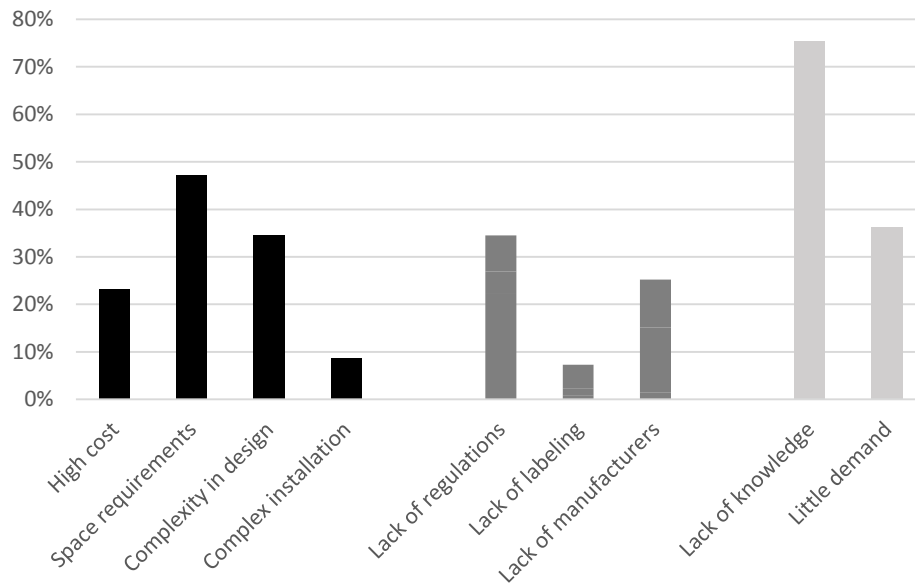


Figure 4. Main reasons for the limited use of TES highlighted in the survey (multiple choice, percentage of responses). Barriers are clustered from left to right into economic and technical (black), social - regulatory level (dark grey) and social – project level (light grey).

The above mentioned social barriers, together with the ones highlighted by the focus group, are clustered into three categories, as shown in Table 2.

Table 2. Social barriers of TES

a. Contextual level	b. Regulatory level	c. Project level
<p><b>Specificity of the Spanish climate.</b> TES being highly dependent on climatic conditions, direct transposition of the European Directives is not suitable for its development.</p> <p><b>Cultural values and habits.</b> TES often require an active participation of final users which is generally overlooked.</p>	<p><b>Lack of adapted regulations.</b> TES is rarely taken into account in the regulatory framework.</p> <p><b>Lack of tools to manage complexity.</b> Overregulation and lack of examples of best practices.</p>	<p><b>Lack of technical knowledge.</b> And even loss of knowledge compared to traditional building practices.</p> <p><b>Poor dissemination of best practice cases.</b> Unexperienced practitioners find troubles in learning from previous cases.</p> <p><b>“Technical indolence”.</b> Rare proactive attitude from practitioners.</p>

#### a. Contextual level: Spanish climate constrictions

The responsiveness of TES to climatic conditions requires the development of specific regulation for each climate zone. Most of the existent regulations at the European level are aimed at continental climates that are not so prevalent in Mediterranean countries. In addition, climatic conditions also influence the cultural context. These arguments led the focus group to argue that direct transposition of European Directives hinders the development of TES in Spain.

*What I have seen (...) especially in research, is that we try to mirror ourselves in countries like Germany, France and the Nordic countries, and (...) what they used there [in Europe] and is intended to be transferred here into regulations, is not valid! (...) is a technology that is more complex and must be adapted to the place where it is to be*

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

*implemented, so it must be in the design from the beginning. Because what is valid here [Barcelona] is not valid in Perpinyà or Lleida! This is the issue. (P8)*

Another contextual factor that is often disregarded is the cultural. occupants and their life styles and habits are rarely taken into account in design and construction phases. This is relevant when TES are used in a project, as the performance of TES often depend, as other so called passive systems, on the active participation of users in its management. This is the case, for instance of Trombe walls and greenhouses. Such implication is becoming less common in our postmodern societies.

*Trust in foreign models? No way! The Mediterranean is the Mediterranean, and so it has always been said. It is true that we are changing as a society: I also have children who do not pull the blinds. (P4)*

### **b. Regulatory level**

At the regulatory level, the lack of specific regulations was highlighted as one of the main barriers for TES both in quantitative and qualitative methods. For example, the regulation fixes minimum values for thermal transmittance of building envelopes, but it does not give any indication for thermal inertia. It just mentions that it should be taken into account in calculations. The professionals claim that there is lack of guidelines for the use of TES, especially in bioclimatic strategies where TES is not part of an industrialised product.

*The one who bets on it must be highly motivated. For sure. Someone who knows the technology, who trusts it, and to whom it appeals in some way. And for it to spread, we need success stories. (P4)*

Successful cases, which are currently rare and badly communicated according to the focus group, are regarded as an effective tool to deal with the complexity of TES technologies and provide robust guidance for their use. In this sense, a more active role of the administration in providing simplified and adapted standards and examples is requested, as it has been done in northern European countries.

### **c. Project level**

As mentioned before, regarding social barriers, professionals have put the emphasis on the lack of knowledge among practitioners. Many professionals are reluctant to use TES in their projects due to their unfamiliarity with these technologies. They tend to believe that using TES will be a constraint on their choices in terms of space use and compatible construction systems.

*(...) I believe that due to ignorance. And because you think: it will limit me, now I need a mass of I don't know how many cubic meters, and weight, I don't know how much storage, near to the windows, a dark pavement, some dampers, an opaque part in the facade... but the few cases that exist, they're delighted. The comfort they have: a natural comfort. (P6)*

Lack of knowledge on TES and related technologies was also the main barrier identified in the survey when asked directly. But not only this, the survey also tested the actual knowledge on TES of the respondents. The participants were asked to identify TES technologies among a list of nine energy solutions. Most of the respondents successfully sorted the TES technologies, however, it is noticeably that this was one of the questions with the lowest number of answers, as only 50% of the people that undertook the questionnaire answered this question. The results are presented in Figure 5, 90% of the respondents adequately classified between five and eight of the technologies on the list and just 5% managed to sort them all out properly.

Among the TES technologies listed, the most familiar was thermal inertia of walls which was identified with TES by 83% of the respondents. Similarly, thermal stores and inertia reservoirs in

heating systems were identified as TES by 73% and 66% respectively. The TES technology which respondents had more difficulties in identifying was the electric boiler. Less than 15% of the respondents identified other kind of technologies as TES. Only two respondents mistook gas tanks for TES. More confusion was found for solar panels, which were identified as TES in 24% of the cases, probably because they are installed together with thermal stores in most of the cases.

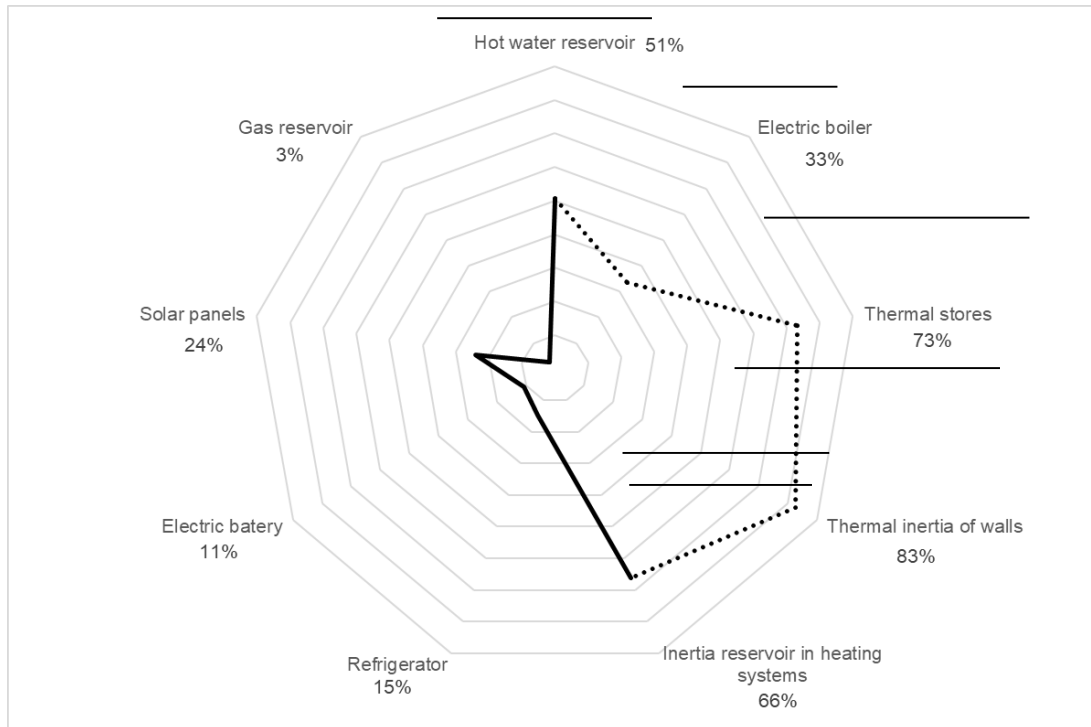


Figure 5. Energy solutions matched with TES. Note: Actual TES technologies shown to the right and with dotted line. Source: on TES awareness, 2018.

Using the correct identification of these technologies as a new variable, a higher level of knowledge was observed between professionals who had taken some training in energy efficiency (mean 6.6) than between those who had not (mean 5.8). In relation to the professional profile, results show a higher knowledge among energy advisors and architects, with a mean of 7.6 and 6.8 respectively.

These results reinforce the general feeling that the concept of TES is not well known by professionals, even by those who are familiar with other technical concepts related to energy efficiency of buildings, such as nZEB<sup>2</sup>. This is considered to be a major barrier for TES implementation. The immaturity of some of the TES technologies, like the use of PCM in active or passive systems may explain, in part, this situation. A greater dissemination of their potential performance, especially at long-term, is needed.

Lack of knowledge is closely related to training shortcomings. The poor dissemination of success and best practice cases does not help to consolidate experiential knowledge, which is considered more valuable than theoretical learning.

<sup>2</sup> Indeed, this was tested in the survey. Most of the respondents (80%) claimed to be familiar with the concept of nZEB and the results indicated that they actually are, as their definitions matched with the ones from international institutions such as the Energy Department of EUA and the EPDB (EPBD, 2010/31/EC).

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65

*(...) the training of practitioners does not fit... (...) we know that these technologies exist but then when it comes to explaining exactly how to design and set some design parameters... this is where the challenge arise. (P7)*

Widespread inexperience on the part of professionals is an even more important barrier when the most reliable source of information for them is their own colleagues. In the survey, the respondents admitted to trust preferably on their own experience or the experience of their colleagues when it comes to decision making. Other sources of guarantee reported were independent certification labels and manufacturer's guarantees. Regarding the usefulness of eco-labels, opinions were divided between the 45% of the respondents believing that they are relevant and the 30% with a negative perception of them.

Another aspect was highlighted. Some experts argued that besides lack of regulations and training there is a sort of "technical indolence" among professionals, that is, low motivation in having a proactive attitude.

*(...) motivation. Obviously it is closely related to consciousness. I have to do it, I don't have to wait for the authority, the administration, the practitioner or my head to make me do it. Why am I not motivated? (P6)*

## 5. Conclusions

Thermal energy storage (TES) is a term clustering a wide range of technologies with different applications and different market acceptance. Thus, they are rarely considered as a unity outside the academia. The fact that only half of the surveyed answered the questions related to the identification of TES technologies is evidence that professionals are not familiar with this terminology despite having made use of some of these technologies in their projects. The results also showed that even the professionals familiar with TES, are not always capable to identify this family of technologies, which proves that the meaning of the term TES is not clear yet. These findings are even more significant when taking into account the biased sample: most of the respondents were interested in energy efficiency but showed difficulties identifying TES.

Indeed, it seems to be a consensus that one of the main barriers for TES implementation is the lack of knowledge about these systems. The principles of thermal storage were included in several of the vernacular technologies for environmental control, such as massive walls, but this knowledge is lost in mainstream building practices. A clear commitment is needed from the practitioners, which translates into first, considering TES as a viable alternative for their projects and, second, engaging in continuous training aiming at the recovering of those traditional good practices that are being lost.

The lack of regulations might be one of the reasons why the professionals are not doing much effort in mastering this issue. In this sense, the role of the administration is key in promoting both demand and prescription of TES technologies. A clear roadmap setting building energy efficiency objectives is missed. It should be aimed at the coordination of the efforts made at local, regional and national level.

Finally, a further key issue to consider is the transversal role of training. It should not only be aimed at disseminating knowledge of the technologies themselves but also at promoting awareness among all the actors involved: from the users to the administration and the technicians. Specifically, when talking about the training of the practitioners who are to prescribe these technologies, the role of the university is stressed. It is understood that the university should be the platform providing general and basic knowledge of the discipline, but it should also promote



1 the acquisition of practical experience which complements such knowledge. This experience must  
2 also be combined with more competence-based training, including teamwork learning, business  
3 vision and communication skills.

4 What is the future of TES in buildings? Different factors will play in favour of its consolidation.  
5 First, those related to the technology itself, such as durability or simplicity of application together  
6 with a lower cost. A second set of factors will be those related to the prevalent and specific social  
7 and economic structure in each area. Dominant cultural values and lifestyles, as well as climate  
8 conditions, play a key role encouraging the adoption or not of new technologies. Finally, the part  
9 played on an individual level cannot be neglected: personal values and interactions with the  
10 environment will promote certain energy efficient solutions in front of others. The prevailing  
11 pattern based on seeking short term results and a materialistic understanding of well-being play  
12 against a more wide-spread adoption of TES technologies in buildings. Authors would like to  
13 stress the prevalent individual social values over collective and long-term perspective, the first  
14 ones are based on self-interest well-being and getting immediately our (sometimes material)  
15 goals, without contemplating any possible individual endeavour in order to get a collective and  
16 long-term well-being, more sustainable in all dimensions to be considered: environmental,  
17 economic and social. Awareness on the part of all the stakeholders involved can be a catalyst  
18 helping towards a successful TES implementation.  
19  
20  
21  
22  
23

## 24 **Acknowledgements**

25  
26  
27 This study was supported by the *Ministerio de Economía y Competitividad* (MINECO) and  
28 the *Universitat Rovira i Virgili* (URV) (FJCI-2016-28789). The authors would like to  
29 acknowledge financial support from the Spanish Ministry of Economy and Competitiveness  
30 ENE2015-64117-C5-2-R and ENE2015-64117-C5-3-R (MINECO/FEDER, UE), RTI2018-  
31 093849-B-C32 and RTI2018-093849-B-C33 MCIU/AEI/FEDER, UE and CTQ2016-77968  
32 (MINECO/FEDER) and the *Agencia Estatal de Investigación* (BIA2017-88401-R). The authors  
33 would like to thank the Catalan Government for the quality accreditation given to their research  
34 groups (2017 SGR 118, 2017 SGR 1758 and 2017 SGR 1125). The authors acknowledge the  
35 support from COAC and CAATEEB for the field work needed for this research.  
36  
37  
38

## 39 **References**

- 40  
41  
42 [1] A. Calderón, C. Barreneche, K. Hernández-Valle, E. Galindo, M. Segarra, A.I. Fernández,  
43 Where is Thermal Energy Storage (TES) research going? A bibliometric analysis, Sol.  
44 Energy. (2019).  
45  
46 [2] Sandia National Laboratories, DOE Global Energy Storage Database, (2019).  
47 <https://www.energystorageexchange.org/> (accessed July 30, 2019).  
48  
49 [3] A. Gutierrez, L. Miró, A. Gil, J. Rodriguez-Aseguinolaza, C. Barreneche, N. Calvet, X.  
50 Py, A.I. Fernández, M. Grágeda, S. Ushak, Others, Advances in the valorization of waste  
51 and by-product materials as thermal energy storage (TES) materials, Renew. Sustain.  
52 Energy Rev. 59 (2016) 763–783.  
53  
54 [4] International Renewable Energy Agency (IRENA), Innovation outlook thermal energy  
55 storage, (2020). [https://www.irena.org/-](https://www.irena.org/-/media/Files/IRENA/Agency/Publication/2020/Nov/IRENA_Innovation_Outlook_TES_2020.pdf)  
56 [/media/Files/IRENA/Agency/Publication/2020/Nov/IRENA\\_Innovation\\_Outlook\\_TES\\_](https://www.irena.org/-/media/Files/IRENA/Agency/Publication/2020/Nov/IRENA_Innovation_Outlook_TES_2020.pdf)  
57 [2020.pdf](https://www.irena.org/-/media/Files/IRENA/Agency/Publication/2020/Nov/IRENA_Innovation_Outlook_TES_2020.pdf).  
58  
59 [5] J.U. FCH, Commercialisation of energy storage in Europe. Final Report, 2015.  
60  
61  
62  
63  
64  
65

- 1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65
- [6] M.C. Lott, S.-I. Kim, C. Tam, D. Houssin, J.F. Gagné, Technology roadmap: energy storage, Int. Energy Agency (IEA), Fr. (2014).
  - [7] IEA, Energy Efficiency 2019, Paris, France, 2019. <https://www.iea.org/reports/energy-efficiency-2019>.
  - [8] IDAE, Studies, reports and statistics, (n.d.). <https://www.idae.es/en/studies-reports-and-statistics>.
  - [9] L. Navarro, A. de Gracia, S. Colclough, M. Browne, S.J. McCormack, P. Griffiths, L.F. Cabeza, Thermal energy storage in building integrated thermal systems: A review. Part 1. active storage systems, *Renew. Energy*. 88 (2016) 526–547. doi:10.1016/j.renene.2015.11.040.
  - [10] L. Navarro, A. de Gracia, D. Niall, A. Castell, M. Browne, S.J. McCormack, P. Griffiths, L.F. Cabeza, Thermal energy storage in building integrated thermal systems: A review. Part 2. Integration as passive system, *Renew. Energy*. 85 (2016) 1334–1356. doi:10.1016/j.renene.2015.06.064.
  - [11] B.K. Sovacool, What are we doing here? Analyzing fifteen years of energy scholarship and proposing a social science research agenda, *Energy Res. Soc. Sci.* 1 (2014) 1–29.
  - [12] B.K. Sovacool, Diversity: energy studies need social science, *Nat. News*. 511 (2014) 529.
  - [13] P. Devine-Wright, S. Batel, O. Aas, B. Sovacool, M.C. LaBelle, A. Ruud, A conceptual framework for understanding the social acceptance of energy infrastructure: Insights from energy storage, *Energy Policy*. 107 (2017) 27–31. doi:10.1016/j.enpol.2017.04.020.
  - [14] S. D’Oca, A. Ferrante, C. Ferrer, R. Perneti, A. Gralka, R. Sebastian, P. op ‘t Veld, Technical, Financial, and Social Barriers and Challenges in Deep Building Renovation: Integration of Lessons Learned from the H2020 Cluster Projects, *Buildings*. 8 (2018) 174. doi:10.3390/buildings8120174.
  - [15] S. Hu, D. Yan, S. Guo, Y. Cui, B. Dong, A survey on energy consumption and energy usage behavior of households and residential building in urban China, *Energy Build.* 148 (2017) 366–378. doi:10.1016/j.enbuild.2017.03.064.
  - [16] S. Halbe, B. Chowdhury, A. Abbas, Mitigating Rebound Effect of Demand Response using Battery Energy Storage and Electric Water Heaters, in: 2019 IEEE 16th Int. Conf. Smart Cities Improv. Qual. Life Using ICT IoT AI, 2019: pp. 95–99. doi:10.1109/HONET.2019.8908081.
  - [17] J. Barnett, K. Burningham, G. Walker, N. Cass, Imagined publics and engagement around renewable energy technologies in the UK, 1 (2012) 36–50. doi:10.1177/0963662510365663.
  - [18] S. Owens, L. Driffill, How to change attitudes and behaviours in the context of energy, *Energy Policy*. 36 (2008) 4412–4418. doi:10.1016/j.enpol.2008.09.031.
  - [19] R. Wüstenhagen, M. Wolsink, M.J. Bürer, Social acceptance of renewable energy innovation: An introduction to the concept, *Energy Policy*. 35 (2007) 2683–2691.
  - [20] L. Gooding, M.S. Gul, Enabling a self-sufficient energy efficient retrofit services sector future: A qualitative study, *Energy Build.* 156 (2017) 306–314. doi:10.1016/j.enbuild.2017.09.072.
  - [21] Instituto Nacional de Estadística (INE), Publicaciones de construcción de edificios (licencias municipales de obra), (n.d.). <https://www.mitma.gob.es/informacion-para-el-ciudadano/informacion-estadistica/construccion/construccion-de-edificios/publicaciones-de-construccion-de-edificios-licencias-municipales-de-obra>.

- 1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65
- [22] L. Gailing, M. Naumann, Energy Research & Social Science Using focus groups to study energy transitions : Researching or producing new social realities ?, Energy Res. Soc. Sci. 45 (2018) 355–362. doi:10.1016/j.erss.2018.07.004.
  - [23] E. Luque, Encuesta on-line arquitectos 2017. Informe. Fundación Arquia, 2017. [https://fundacion.arquia.es/media/encuestas/downloads/informes/informe\\_encuesta\\_arquitectos\\_2017.pdf](https://fundacion.arquia.es/media/encuestas/downloads/informes/informe_encuesta_arquitectos_2017.pdf).
  - [24] A. Pittini, G. Koessl, J. Dijol, E. Lakatos, L. Ghekiere, M. Goudis, The State of Housing in the EU, Hous. Eur. Rev. (2017).